

# Datasheet Bolle Coloured – New-In North America

2025





General Information p.5

**Bolle**

|                              |      |
|------------------------------|------|
| Bolle Pendant                | p.8  |
| Bolle Pendant 06             | p.10 |
| Bolle Chandelier Circular 14 | p.12 |
| Bolle Chandelier Circular 24 | p.14 |
| Bolle Chandelier Circular 34 | p.16 |
| Bolle Chandelier Linear 14   | p.18 |
| Bolle Chandelier ZigZag 24   | p.20 |
| Bolle Chandelier ZigZag 34   | p.22 |
| Bolle Wall 04                | p.24 |
| Bolle Floor 06               | p.26 |

**Soffio**

|                         |      |
|-------------------------|------|
| Soffio Pendant          | p.27 |
| Soffio Wall Horizontal  | p.29 |
| Soffio Wall Vertical 18 | p.31 |
| Soffio Floor            | p.33 |
| Soffio Table 30         | p.35 |

General Notes p.38

Terms and Conditions p.39



## LEGEND DROPHEIGHT

### *Stem Height*

Standard stem height, applicable with flex cable suspension.

### *Minimum Drop Height*

Minimum drop height, applicable with metal tube suspension.

### *Drop Height*

Requested total product drop height, canopy included, applicable with metal tube suspension.

## DRIVER OPTIONS

### *Remote Driver*

A remote driver has to be installed outside and away from the fixture. Its position is to be specified and installed no more than 10 m from the lamp by qualified installation personnel in an appropriate space. Remote drivers are recommended for easy maintenance.

### *Built-in Driver*

A built-in driver is positioned within the fixture itself and enables quick installation. This configuration ensures compatibility with all types of wiring. Built-in drivers are recommended where a remote driver configuration cannot be confirmed by qualified installation personnel.

## DIMMING STANDARDS

### *Phase cut dimming*

requires standard power cables

Phasecut or Triac dimming is considered compatible in the majority of installations but has a low dimming output quality. It works by restricting the amount of power from the AC mains voltage into the driver through the use of a rotary or slider control wall switch. When the power is reduced to below roughly 40% the fixture effectively turns off.

### *Switch/push Dimming*

requires 1 extra HIGH VOLTAGE cable

Switch or Push dimming is a simple digital dimming option and is operated via a 'push to make' or retractive switch. The push switch controls the switching on and off of the luminaire with momentary pressing, and the dimming up or down by holding down the switch. This dimming method requires an extra 'switched live' cable as well as the standard power wires.

### *1-10 Volt Dimming*

requires 2 extra LOW VOLTAGE cables

1-10 Volt dimming is also known as analogue dimming. This dimming standard is controlled via a potentiometer switch which sends an analogue signal through the 2 extra cables to the driver.

### *DALI Dimming*

requires 2 extra LOW VOLTAGE cables

DALI stands for Digitally Addressable Lighting Interface. DALI is a recognised standard that assigns an individual address to each driver allowing control and communication with each driver. All these drivers can be controlled from a central computer, and manually overridden at a DALI wall switch. This advanced dimming method requires two low voltage control wires to be run from the control hub to the driver as well as the standard power wires.

## REQUIRES ELECTRICIAN'S APPROVAL

Please verify your electrical system before selecting a dimming standard, other than Phase-Cut

## SYMBOLS



All lamps require wire entrance at the centre of the fixture unless otherwise indicated with this symbol. Fixtures with multiple symbols require multiple wire entrances.



UL marking certifies that the product is conform to the North American standards, and is issued by UL, independent organisation leader in the field of product safety certification for the North American market.

IP20

Degree of Protection symbol. Our products are protected from solid objects larger than 12mm in diameter. They are not protected from dust, humidity and water.



Class I - The lamp must be connected to electrical earth/ground.



Class II - The lamp does not require a safety connection to electrical earth/ground.



Class III - The lamp does not require a safety connection to electrical earth/ground.

# Brass Finish

## BRUSHED BRASS

Brass hand-finished with horizontal brushing. Protected with a semi-gloss transparent coating.



## BRUSHED BRONZE

Brass with accelerated aging to become a bronze finish. Hand-finished with horizontal brushing. Protected with a semi-matt transparent coating.



## BLACKENED BRASS

Brass with accelerated aging to become an extra dark chocolate finish. Hand-finished with horizontal brushing. Protected with a semi-matt transparent coating.



#### BRUSHED NICKEL

Electroplated nickel over Brass with horizontal brushing.  
Protected with a semi-gloss transparent coating.

#### POLISHED NICKEL

Electroplated Nickel over polished brass.  
Protected with a semi-gloss transparent coating.

#### CUSTOM FINISH

Our products can be customized with most metal finishes, please check with our design advisors if you have any particular requirement.



*Please advise if our products are to be installed close to air conditioning vents or in windy or salty air conditions.*

# Bolle Pendant

BTPE



**MATERIALS**

Hand-blown transparent borosilicate glass and hand-finished or electroplated brass

**WEIGHT INCL. CANOPY**

Max 4.5 lbs

**POWER INPUT**

110-120V 50-60Hz

**LIGHT SOURCE (INCLUDED)**

Proprietary Softspot75 LED, 9W, 380 Lumens, 2700K warm white. CRI>95. 75% downwards and 25% upwards





BOLLE PENDANT 04 SMALL

CONFIGURATION

STEP 1: VERSION SIZE (UNIT: IN)


**Bolle Pendant 04 Small**  
BTPE04S

**Bolle Pendant 04**  
BTPE04

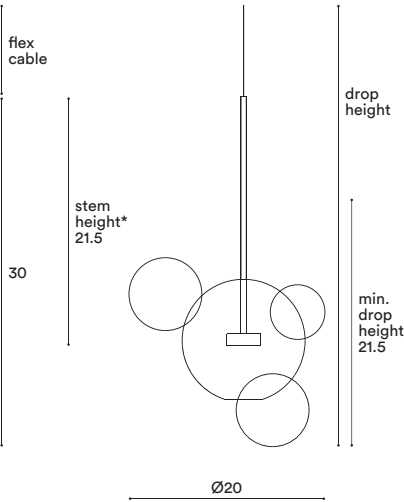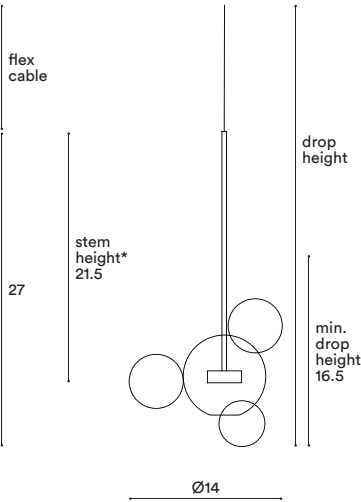

*\*Custom Stem Height available upon request*

STEP 2: METAL FINISHES (INCLUDED IN STARTING PRICE)

|                                                                                    |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Brushed Brass<br>BR                                                                | Brushed Bronze<br>BZ                                                                | Blackened Brass<br>BK                                                               | Brushed Nickel<br>NK                                                                 | Polished Nickel<br>PN                                                                 |

### STEP 3: GLASS COLOUR



Transparent  
**TR**



Iridescent  
**IR**



Blushed Gold  
**BO**



Blushed Sand  
**SD**



Blushed Peach  
**PC**



Blushed Light Green  
**LG**




Blushed Light Blue  
**LB**



Blushed Smokey Grey  
**BG**

### STEP 4: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))
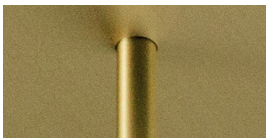
| FABRIC FLEX CABLE                                                                | FINISH          | DROP HEIGHT      | CODE                     |
|----------------------------------------------------------------------------------|-----------------|------------------|--------------------------|
|  | Black           | Max 157,5 in     | 04B                      |
|                                                                                  |                 | Max 394 in       | 10B                      |
|  | White           | Max 157,5 in     | 04W                      |
|                                                                                  |                 | Max 394 in       | 10W                      |
| METAL TUBE (39 IN MODULES)                                                       | FINISH          | DROP HEIGHT      | SPECIFY YOUR DROP HEIGHT |
|  | Matching Finish | 16 – 39 in       | <b>000 CM</b>            |
|                                                                                  |                 | 39,5 – 78,5 in   |                          |
|                                                                                  |                 | 79 – 118 in      |                          |
|                                                                                  |                 | 118,5 – 157,5 in |                          |
|                                                                                  |                 | up to 393,5 in   |                          |

### STEP 5: CANOPY

| Type of Canopy                                                                     | FINISH                    | CODE WITH DIMMABLE STANDARD |                                                                           |
|------------------------------------------------------------------------------------|---------------------------|-----------------------------|---------------------------------------------------------------------------|
|                                                                                    |                           | Phasecut                    | 0-10 Volt<br>Alternative dimming standard, if required by electrician     |
|  | 1 Canopy: Ø5.5×H2 in      | Black (9005)                | BL135BP                                                                   |
|                                                                                    | Ceiling Type: All         | White (9016)                | WH135BP                                                                   |
|                                                                                    | Driver position: Built-in | Brushed Brass               | BR135BP                                                                   |
|                                                                                    |                           | Brushed Bronze              | BZ135BP                                                                   |
|                                                                                    |                           | Blackened Brass             | BK135BP                                                                   |
|                                                                                    |                           | Brushed Nickel              | NK135BP                                                                   |
|                                                                                    |                           | Polished Nickel             | PN135BP                                                                   |
|                                                                                    |                           |                             | BL135BV<br>WH135BV<br>BR135BV<br>BZ135BV<br>BK135BV<br>NK135BV<br>PN135BV |

Custom colours (RAL Classic): availability and price upon request

# Bolle Pendant 06

BTPE06



**MATERIALS**

Hand-blown transparent borosilicate glass and hand-finished or electroplated brass

**WEIGHT INCL. CANOPY**

Max 4.5 lbs

**POWER INPUT**

110-120V 50-60Hz

**LIGHT SOURCE (INCLUDED)**

Proprietary Softspot75 LED, 9W, 380 Lumens, 2700K warm white. CRI>95. 75% downwards and 25% upwards



BOLLE PENDANT 04 SMALL


CONFIGURATION

STEP 1: VERSION

SIZE (UNIT: IN)


**Bolle Pendant 06**

BTPE06

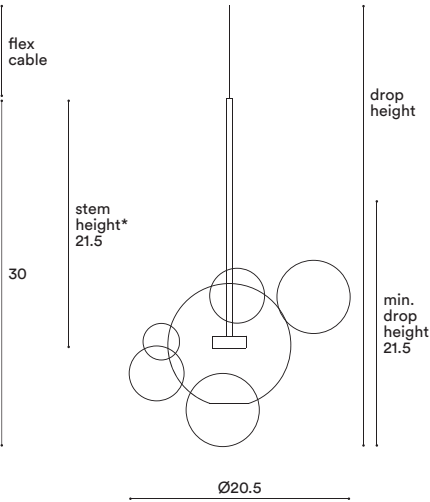

*\*Custom Stem Height available upon request*

STEP 2: METAL FINISHES (INCLUDED IN STARTING PRICE)

|                                                                                    |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Brushed Brass<br>BR                                                                | Brushed Bronze<br>BZ                                                                | Blackened Brass<br>BK                                                               | Brushed Nickel<br>NK                                                                 | Polished Nickel<br>PN                                                                 |

### STEP 3: GLASS COLOUR



Transparent  
**TR**



Iridescent  
**IR**



Blushed Gold  
**BO**



Blushed Sand  
**SD**



Blushed Peach  
**PC**



Blushed Light Green  
**LG**



Blushed Light Blue  
**LB**



Blushed Smokey Grey  
**BG**

### STEP 4: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

| FABRIC FLEX CABLE                                                                | FINISH          | DROP HEIGHT      | CODE                     |
|----------------------------------------------------------------------------------|-----------------|------------------|--------------------------|
|  | Black           | Max 157,5 in     | 04B                      |
|                                                                                  |                 | Max 394 in       | 10B                      |
|  | White           | Max 157,5 in     | 04W                      |
|                                                                                  |                 | Max 394 in       | 10W                      |
| METAL TUBE (39 IN MODULES) FINISH                                                |                 | DROP HEIGHT      | SPECIFY YOUR DROP HEIGHT |
|  | Matching Finish | 21,5 – 39 in     | 000 CM                   |
|                                                                                  |                 | 39,5 – 78,5 in   |                          |
|                                                                                  |                 | 79 – 118 in      |                          |
|                                                                                  |                 | 118,5 – 157,5 in |                          |
|                                                                                  |                 | up to 393,5 in   |                          |

### STEP 5: CANOPY

| Type of Canopy                                                                     | FINISH                    |                 | CODE WITH DIMMABLE STANDARD |                                                                          |
|------------------------------------------------------------------------------------|---------------------------|-----------------|-----------------------------|--------------------------------------------------------------------------|
|                                                                                    |                           |                 | Phasecut                    | 0-10 Volt<br>Alternative dimming standard, if<br>required by electrician |
|  | 1 Canopy: Ø5.5×H2 in      | Black (9005)    | BL135BP                     | BL135BV                                                                  |
|                                                                                    | Ceiling Type: All         | White (9016)    | WH135BP                     | WH135BV                                                                  |
|                                                                                    | Driver position: Built-in | Brushed Brass   | BR135BP                     | BR135BV                                                                  |
|                                                                                    |                           | Brushed Bronze  | BZ135BP                     | BZ135BV                                                                  |
|                                                                                    |                           | Blackened Brass | BK135BP                     | BK135BV                                                                  |
|                                                                                    |                           | Brushed Nickel  | NK135BP                     | NK135BV                                                                  |
|                                                                                    |                           | Polished Nickel | PN135BP                     | PN135BV                                                                  |

Custom colours (RAL Classic): availability and price upon request

# Bolle Chandelier Circular 14

BTCHCR14



**MATERIALS**

Hand-blown transparent borosilicate glass and hand-finished or electroplated brass

**WEIGHT INCL. CANOPY**

Max 25.5 lbs

**POWER INPUT**

110-120V 50-60Hz

**LIGHT SOURCE (INCLUDED)**

3 Proprietary Softspot75 LEDs,  
27W, 1140 Lumens, 2700K warm white. CRI>95.  
75% downwards and 25% upwards




BOLLE CHANDELIER CIRCULAR 14

CONFIGURATION

VERSION SIZE (UNIT: IN)

**Bolle Chandelier Circular 14**  
BTCHCR14

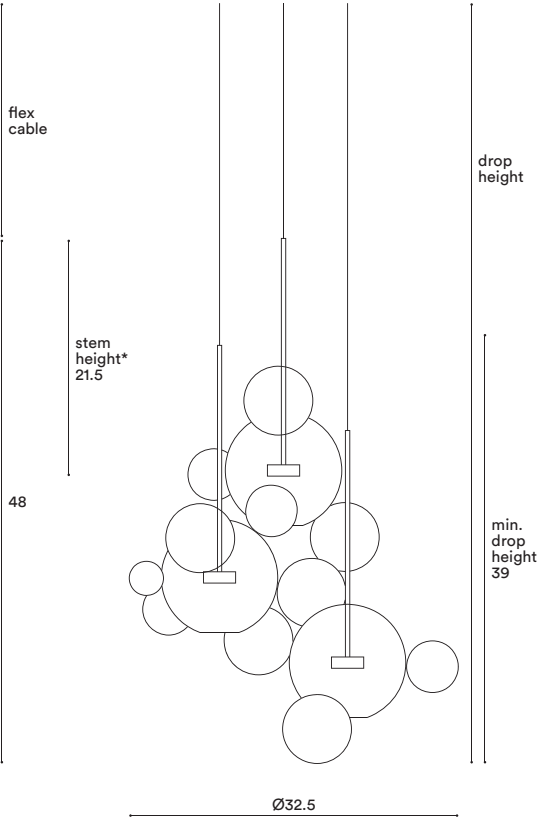

*\*Custom Stem Height available upon request*

STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)

|                                                                                    |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Brushed Brass<br>BR                                                                | Brushed Bronze<br>BZ                                                                | Blackened Brass<br>BK                                                               | Brushed Nickel<br>NK                                                                 | Polished Nickel<br>PN                                                                 |

## STEP 2: GLASS COLOUR



Transparent  
**TR**



Iridescent  
**IR**



Blushed Gold  
**BO**



Blushed Sand  
**SD**



Blushed Peach  
**PC**



Blushed Light Green  
**LG**



Blushed Light Blue  
**LB**



Blushed Smokey Grey  
**BG**

## STEP 3: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

| FABRIC FLEX CABLE                                                                | FINISH          | DROP HEIGHT      | CODE                     |
|----------------------------------------------------------------------------------|-----------------|------------------|--------------------------|
|  | Black           | Max 157,5 in     | 04B                      |
|                                                                                  |                 | Max 394 in       | 10B                      |
|  | White           | Max 157,5 in     | 04W                      |
|                                                                                  |                 | Max 394 in       | 10W                      |
| METAL TUBE (39 IN MODULES)                                                       | FINISH          | DROP HEIGHT      | SPECIFY YOUR DROP HEIGHT |
|  | Matching Finish | 39 – 78,5 in     | <b>000 CM</b>            |
|                                                                                  |                 | 79 – 118 in      |                          |
|                                                                                  |                 | 118,5 – 157,5 in |                          |
|                                                                                  |                 | 158 – 197 in     |                          |
|                                                                                  |                 | up to 393,5 in   |                          |

## STEP 4: CANOPY

| Type of Canopy                                                                     | FINISH                                           | CODE WITH DIMMABLE STANDARD |                                                                       |
|------------------------------------------------------------------------------------|--------------------------------------------------|-----------------------------|-----------------------------------------------------------------------|
|                                                                                    |                                                  | Phasecut                    | 0-10 Volt<br>Alternative dimming standard, if required by electrician |
|  | 1 Canopy: Ø18xH2 in<br>Driver position: Built-in | White (9016)                | WH450BP                                                               |
|                                                                                    |                                                  | Brushed Brass               | BR450BP                                                               |
|                                                                                    |                                                  | Brushed Bronze              | BZ450BP                                                               |
|                                                                                    |                                                  | Blackened Brass             | BK450BP                                                               |
|                                                                                    |                                                  | Brushed Nickel              | NK450BP                                                               |
|                                                                                    |                                                  | Polished Nickel             | PN450BP                                                               |
|                                                                                    |                                                  |                             | WH450BV<br>BR450BV<br>BZ450BV<br>BK450BV<br>NK450BV<br>PN450BV        |

Custom colours (RAL Classic): availability and price upon request

# Bolle Chandelier Circular 24

BTCHCR24



**MATERIALS**

Hand-blown transparent borosilicate glass and hand-finished or electroplated brass

**WEIGHT INCL. CANOPY**

Max 51 lbs

**POWER INPUT**

110-120V 50-60Hz

**LIGHT SOURCE (INCLUDED)**

5 Proprietary Softspot75 LEDs, 45W, 1900 Lumens, 2700K warm white. CRI>95. 75% downwards and 25% upwards




BOLLE CHANDELIER CIRCULAR 24

CONFIGURATION

VERSION SIZE (UNIT: IN)

**Bolle Chandelier Circular 24**  
BTCHCR24

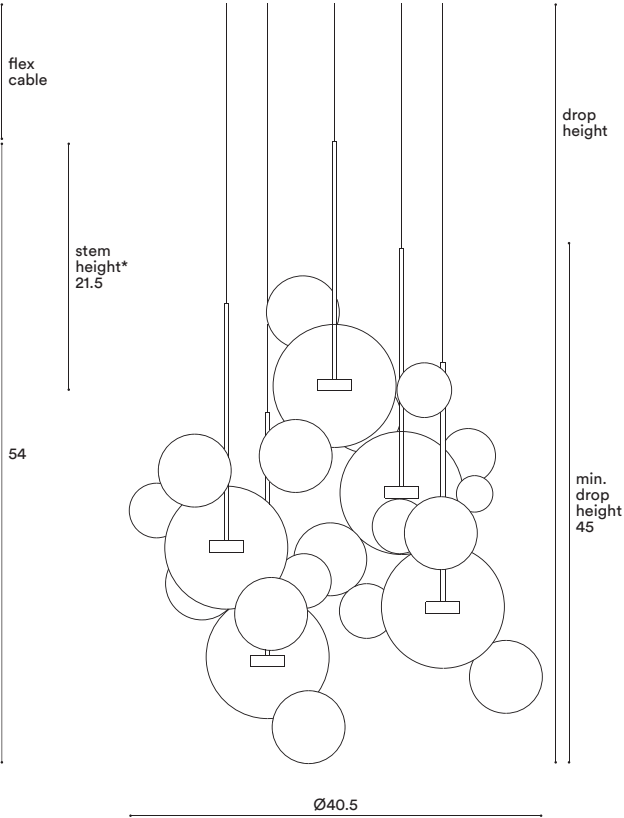

*\*Custom Stem Height available upon request*

STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)

|                                                                                    |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Brushed Brass<br>BR                                                                | Brushed Bronze<br>BZ                                                                | Blackened Brass<br>BK                                                               | Brushed Nickel<br>NK                                                                 | Polished Nickel<br>PN                                                                 |

## STEP 2: GLASS COLOUR



Transparent  
**TR**



Iridescent  
**IR**



Blushed Gold  
**BO**



Blushed Sand  
**SD**



Blushed Peach  
**PC**



Blushed Light Green  
**LG**



Blushed Light Blue  
**LB**



Blushed Smokey Grey  
**BG**

## STEP 3: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

| FABRIC FLEX CABLE                                                                | FINISH          | DROP HEIGHT      | CODE                     |
|----------------------------------------------------------------------------------|-----------------|------------------|--------------------------|
|  | Black           | Max 157,5 in     | 04B                      |
|                                                                                  |                 | Max 394 in       | 10B                      |
|  | White           | Max 157,5 in     | 04W                      |
|                                                                                  |                 | Max 394 in       | 10W                      |
| METAL TUBE (39 IN MODULES)                                                       | FINISH          | DROP HEIGHT      | SPECIFY YOUR DROP HEIGHT |
|  | Matching Finish | 44,5 – 78,5 in   | <b>000 CM</b>            |
|                                                                                  |                 | 79 – 118 in      |                          |
|                                                                                  |                 | 118,5 – 157,5 in |                          |
|                                                                                  |                 | 158 – 197 in     |                          |
|                                                                                  |                 | up to 393,5 in   |                          |

## STEP 4: CANOPY

| Type of Canopy                                                                     | FINISH                                             | CODE WITH DIMMABLE STANDARD |                                                                       |
|------------------------------------------------------------------------------------|----------------------------------------------------|-----------------------------|-----------------------------------------------------------------------|
|                                                                                    |                                                    | Phasecut                    | 0-10 Volt<br>Alternative dimming standard, if required by electrician |
|  | 1 Canopy: Ø24.5×H2 in<br>Driver position: Built-in | White (9016)                | WH620BP                                                               |
|                                                                                    |                                                    | Brushed Brass               | BR620BP                                                               |
|                                                                                    |                                                    | Brushed Bronze              | BZ620BP                                                               |
|                                                                                    |                                                    | Blackened Brass             | BK620BP                                                               |
|                                                                                    |                                                    | Brushed Nickel              | NK620BP                                                               |
|                                                                                    |                                                    | Polished Nickel             | PN620BP                                                               |
|                                                                                    |                                                    |                             | WH620BV                                                               |
|                                                                                    |                                                    |                             | BR620BV                                                               |
|                                                                                    |                                                    |                             | BZ620BV                                                               |
|                                                                                    |                                                    |                             | BK620BV                                                               |
|                                                                                    |                                                    |                             | NK620BV                                                               |
|                                                                                    |                                                    |                             | PN620BV                                                               |

Custom colours (RAL Classic): availability and price upon request

# Bolle Chandelier Circular 34

BTCHCR34



**MATERIALS**

Hand-blown transparent  
borosilicate glass and hand-finished  
or electroplated brass

**WEIGHT INCL. CANOPY**

Max 70.5 lbs

**POWER INPUT**

110-120V 50-60Hz

**LIGHT SOURCE (INCLUDED)**

7 Proprietary Softspot75 LEDs,  
63W, 2660 Lumens, 2700K warm white. CRI>95.  
75% downwards and 25% upwards




BOLLE CHANDELIER CIRCULAR 34

**CONFIGURATION**

**VERSION** **SIZE (UNIT: IN)**

**Bolle Chandelier Circular 34**  
BTCHCR34

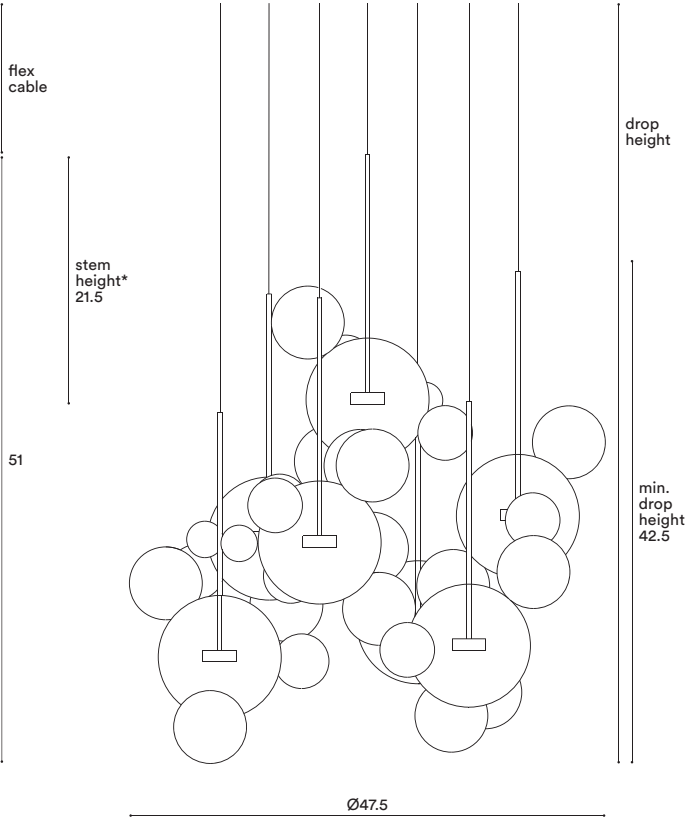

*\*Custom Stem Height available upon request*

**STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)**

|                                                                                    |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Brushed Brass<br>BR                                                                | Brushed Bronze<br>BZ                                                                | Blackened Brass<br>BK                                                               | Brushed Nickel<br>NK                                                                 | Polished Nickel<br>PN                                                                 |

## STEP 2: GLASS COLOUR



Transparent  
**TR**



Iridescent  
**IR**



Blushed Gold  
**BO**



Blushed Sand  
**SD**



Blushed Peach  
**PC**



Blushed Light Green  
**LG**



Blushed Light Blue  
**LB**



Blushed Smokey Grey  
**BG**

## STEP 3: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

| FABRIC FLEX CABLE                                                                | FINISH          | DROP HEIGHT      | CODE                     |
|----------------------------------------------------------------------------------|-----------------|------------------|--------------------------|
|  | Black           | Max 157,5 in     | 04B                      |
|                                                                                  |                 | Max 394 in       | 10B                      |
|  | White           | Max 157,5 in     | 04W                      |
|                                                                                  |                 | Max 394 in       | 10W                      |
| METAL TUBE (39 IN MODULES)                                                       | FINISH          | DROP HEIGHT      | SPECIFY YOUR DROP HEIGHT |
|  | Matching Finish | 42 – 78,5 in     | <b>000 CM</b>            |
|                                                                                  |                 | 79 – 118 in      |                          |
|                                                                                  |                 | 118,5 – 157,5 in |                          |
|                                                                                  |                 | 158 – 197 in     |                          |
|                                                                                  |                 | up to 393,5 in   |                          |

## STEP 4: CANOPY

| Type of Canopy                                                                     | FINISH                                           | CODE WITH DIMMABLE STANDARD                                                       |
|------------------------------------------------------------------------------------|--------------------------------------------------|-----------------------------------------------------------------------------------|
|                                                                                    |                                                  | Phasecut<br>0-10 Volt<br>Alternative dimming standard, if required by electrician |
|  | 1 Canopy: Ø30×H2 in<br>Driver position: Built-in |                                                                                   |
|                                                                                    | White (9016)                                     | WH760BP                                                                           |
|                                                                                    | Brushed Brass                                    | BR760BP                                                                           |
|                                                                                    | Brushed Bronze                                   | BZ760BP                                                                           |
|                                                                                    | Blackened Brass                                  | BK760BP                                                                           |
|                                                                                    | Brushed Nickel                                   | NK760BP                                                                           |
|                                                                                    | Polished Nickel                                  | PN760BP                                                                           |
|                                                                                    |                                                  | WH760BV<br>BR760BV<br>BZ760BV<br>BK760BV<br>NK760BV<br>PN760BV                    |

Custom colours (RAL Classic): availability and price upon request

# Bolle Chandelier Linear 14

BTCHLN14



**MATERIALS**

Hand-blown transparent  
borosilicate glass and hand-finished  
or electroplated brass

**WEIGHT INCL. CANOPY**

Max 30 lbs

**POWER INPUT**

110-120V 50-60Hz

**LIGHT SOURCE (INCLUDED)**

3 Proprietary Softspot75 LEDs,  
27W, 1140 Lumens, 2700K warm white. CRI>95.  
75% downwards and 25% upwards




BOLLE CHANDELIER LINEAR 14

CONFIGURATION

| VERSION | SIZE (UNIT: IN) |
|---------|-----------------|
|---------|-----------------|

**Bolle Chandelier Linear 14**  
BTCHLN14

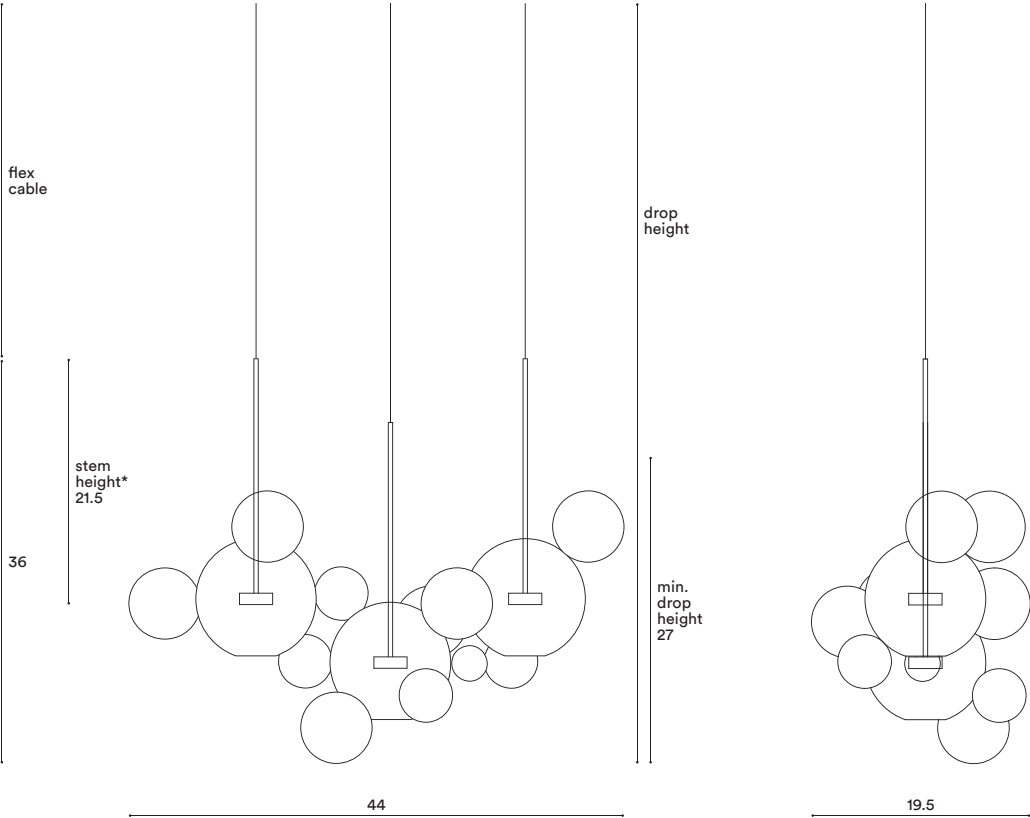

*\*Custom Stem Height available upon request*

STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)

|                                                                                    |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Brushed Brass<br>BR                                                                | Brushed Bronze<br>BZ                                                                | Blackened Brass<br>BK                                                               | Brushed Nickel<br>NK                                                                 | Polished Nickel<br>PN                                                                 |

## STEP 2: GLASS COLOUR



Transparent  
**TR**



Iridescent  
**IR**



Blushed Gold  
**BO**



Blushed Sand  
**SD**



Blushed Peach  
**PC**



Blushed Light Green  
**LG**



Blushed Light Blue  
**LB**



Blushed Smokey Grey  
**BG**

## STEP 3: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

| FABRIC FLEX CABLE                                                                | FINISH          | DROP HEIGHT      | CODE                     |
|----------------------------------------------------------------------------------|-----------------|------------------|--------------------------|
|  | Black           | Max 157,5 in     | 04B                      |
|                                                                                  |                 | Max 394 in       | 10B                      |
|  | White           | Max 157,5 in     | 04W                      |
|                                                                                  |                 | Max 394 in       | 10W                      |
| METAL TUBE (39 IN MODULES) FINISH                                                |                 | DROP HEIGHT      | SPECIFY YOUR DROP HEIGHT |
|  | Matching Finish | 26,5 – 39 in     | <b>000 CM</b>            |
|                                                                                  |                 | 39,5 – 78,5 in   |                          |
|                                                                                  |                 | 79 – 118 in      |                          |
|                                                                                  |                 | 118,5 – 157,5 in |                          |
|                                                                                  |                 | up to 393,5 in   |                          |

## STEP 4: CANOPY

| Type of Canopy                                                                     | FINISH                                                | CODE WITH DIMMABLE STANDARD |                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------|-----------------------------|-----------------------------------------------------------------------|
|                                                                                    |                                                       | Phasecut                    | 0-10 Volt<br>Alternative dimming standard, if required by electrician |
|  | 1 Canopy: W35,5xD7xH2 in<br>Driver position: Built-in | White (9016)                | WH900BP                                                               |
|                                                                                    |                                                       | Brushed Brass               | BR900BP                                                               |
|                                                                                    |                                                       | Brushed Bronze              | BZ900BP                                                               |
|                                                                                    |                                                       | Blackened Brass             | BK900BP                                                               |
|                                                                                    |                                                       | Brushed Nickel              | NK900BP                                                               |
|                                                                                    |                                                       | Polished Nickel             | PN900BP                                                               |
|                                                                                    |                                                       |                             | WH900BV<br>BR900BV<br>BZ900BV<br>BK900BV<br>NK900BV<br>PN900BV        |

Custom colours (RAL Classic): availability and price upon request

# Bolle Chandelier ZigZag 24

BTCHZZ24



**MATERIALS**

Hand-blown transparent  
borosilicate glass and hand-finished  
or electroplated brass

**WEIGHT INCL. CANOPY**

Max 47.5 lbs

**POWER INPUT**

110-120V 50-60Hz

**LIGHT SOURCE (INCLUDED)**

5 Proprietary Softspot75 LEDs,  
45W, 1900 Lumens, 2700K warm white. CRI>95.  
75% downwards and 25% upwards




BOLLE CHANDELIER ZIGZAG 24

**CONFIGURATION**

| VERSION | SIZE (UNIT: IN) |
|---------|-----------------|
|---------|-----------------|

**Bolle Chandelier ZigZag 24**  
BTCHZZ24

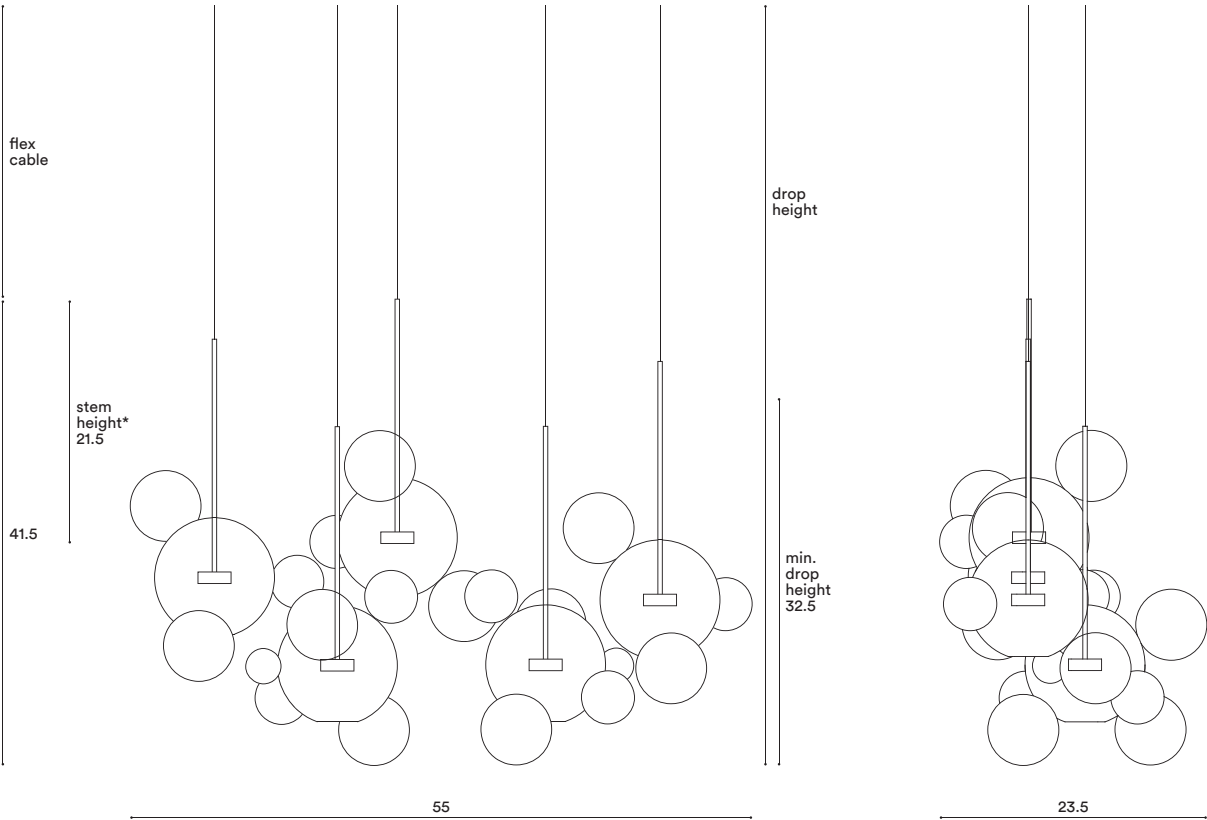

*\*Custom Stem Height available upon request*

**STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)**

|                                                                                    |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Brushed Brass<br>BR                                                                | Brushed Bronze<br>BZ                                                                | Blackened Brass<br>BK                                                               | Brushed Nickel<br>NK                                                                 | Polished Nickel<br>PN                                                                 |

## STEP 2: GLASS COLOUR



Transparent  
**TR**



Iridescent  
**IR**



Blushed Gold  
**BO**



Blushed Sand  
**SD**



Blushed Peach  
**PC**



Blushed Light Green  
**LG**



Blushed Light Blue  
**LB**



Blushed Smokey Grey  
**BG**

## STEP 3: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

| FABRIC FLEX CABLE                                                                | FINISH          | DROP HEIGHT      | CODE                     |
|----------------------------------------------------------------------------------|-----------------|------------------|--------------------------|
|  | Black           | Max 157,5 in     | 04B                      |
|                                                                                  |                 | Max 394 in       | 10B                      |
|  | White           | Max 157,5 in     | 04W                      |
|                                                                                  |                 | Max 394 in       | 10W                      |
| METAL TUBE (39 IN MODULES)                                                       | FINISH          | DROP HEIGHT      | SPECIFY YOUR DROP HEIGHT |
|  | Matching Finish | 32 – 39 in       | <b>000 CM</b>            |
|                                                                                  |                 | 39,5 – 78,5 in   |                          |
|                                                                                  |                 | 79 – 118 in      |                          |
|                                                                                  |                 | 118,5 – 157,5 in |                          |
|                                                                                  |                 | up to 393,5 in   |                          |

## STEP 4: CANOPY

| Type of Canopy                                                                     | FINISH                                              | CODE WITH DIMMABLE STANDARD                                                       |
|------------------------------------------------------------------------------------|-----------------------------------------------------|-----------------------------------------------------------------------------------|
|  | 1 Canopy: W47xD9xH2 in<br>Driver position: Built-in | Phasecut<br>0-10 Volt<br>Alternative dimming standard, if required by electrician |
|                                                                                    |                                                     |                                                                                   |
|  | White (9016)                                        | WH1200BP                                                                          |
|                                                                                    | Brushed Brass                                       | BR1200BP                                                                          |
|                                                                                    | Brushed Bronze                                      | BZ1200BP                                                                          |
|                                                                                    | Blackened Brass                                     | BK1200BP                                                                          |
|                                                                                    | Brushed Nickel                                      | NK1200BP                                                                          |
|                                                                                    | Polished Nickel                                     | PN1200BP                                                                          |
|  | 1 Canopy: W47xD9xH2 in<br>Driver position: Built-in | WH1200BV                                                                          |
|                                                                                    |                                                     | BR1200BV                                                                          |
|                                                                                    |                                                     | BZ1200BV                                                                          |
|                                                                                    |                                                     | BK1200BV                                                                          |
|                                                                                    |                                                     | NK1200BV                                                                          |
|                                                                                    |                                                     | PN1200BV                                                                          |

Custom colours (RAL Classic): availability and price upon request

# Bolle Chandelier ZigZag 34

BTCHZZ34



**MATERIALS**

Hand-blown transparent  
borosilicate glass and hand-finished  
or electroplated brass

**WEIGHT INCL. CANOPY**

Max 75 lbs

**POWER INPUT**

110-120V 50-60Hz

**LIGHT SOURCE (INCLUDED)**

7 Proprietary Softspot75 LEDs,  
63W, 2660 Lumens, 2700K warm white. CRI>95.  
75% downwards and 25% upwards




BOLLE CHANDELIER ZIGZAG 34

CONFIGURATION

| VERSION | SIZE (UNIT: IN) |
|---------|-----------------|
|---------|-----------------|

Bolle Chandelier ZigZag 34  
BTCHZZ34

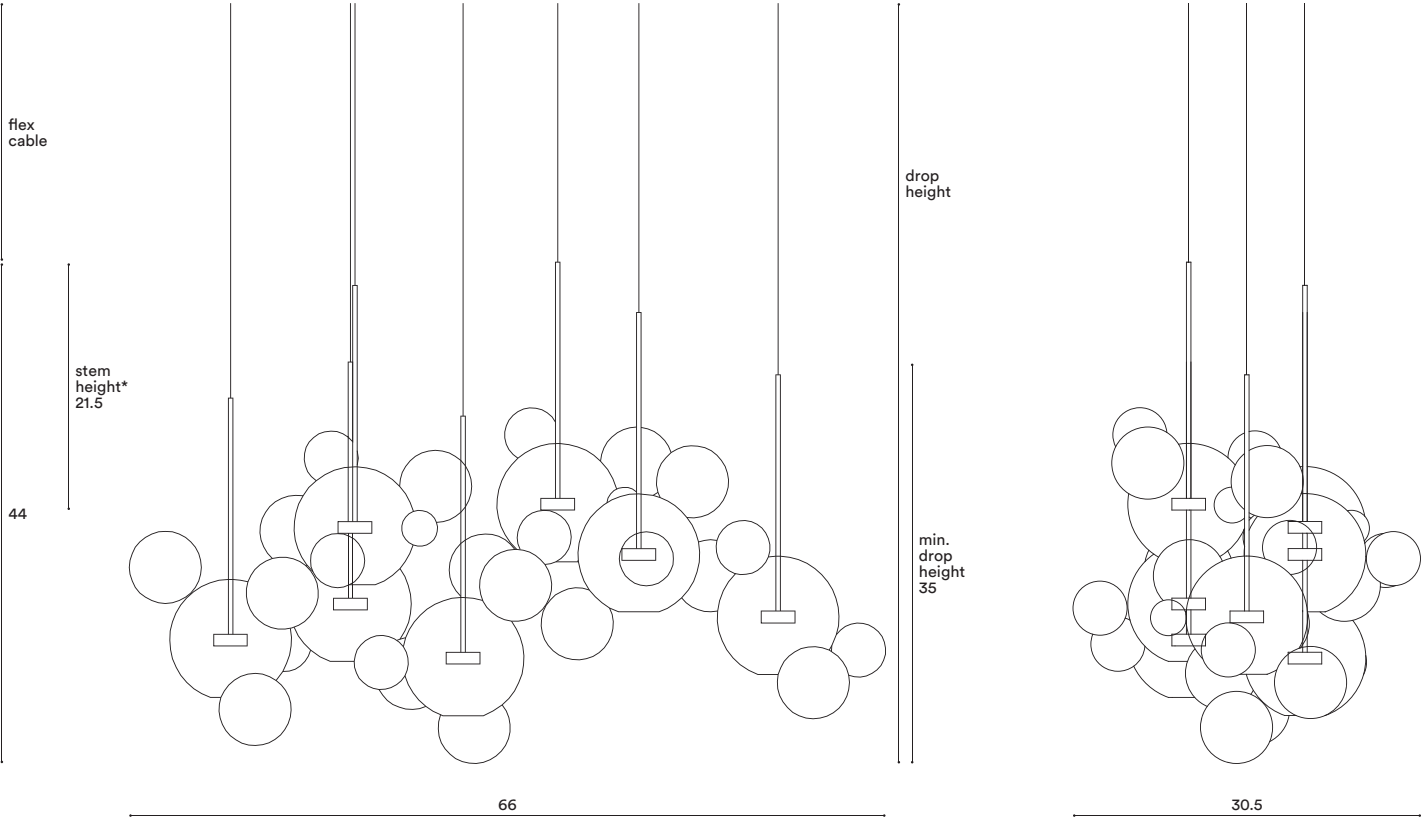

\*Custom Stem Height available upon request

STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)

|                                                                                    |                                                                                     |                                                                                     |                                                                                      |                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |  |
| Brushed Brass<br>BR                                                                | Brushed Bronze<br>BZ                                                                | Blackened Brass<br>BK                                                               | Brushed Nickel<br>NK                                                                 | Polished Nickel<br>PN                                                                 |

## STEP 2: GLASS COLOUR



Transparent  
**TR**



Iridescent  
**IR**



Blushed Gold  
**BO**



Blushed Sand  
**SD**



Blushed Peach  
**PC**



Blushed Light Green  
**LG**



Blushed Light Blue  
**LB**



Blushed Smokey Grey  
**BG**

## STEP 3: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

| FABRIC FLEX CABLE                                                                | FINISH          | DROP HEIGHT      | CODE                     |
|----------------------------------------------------------------------------------|-----------------|------------------|--------------------------|
|  | Black           | Max 157,5 in     | 04B                      |
|                                                                                  |                 | Max 394 in       | 10B                      |
|  | White           | Max 157,5 in     | 04W                      |
|                                                                                  |                 | Max 394 in       | 10W                      |
| METAL TUBE (39 IN MODULES) FINISH                                                |                 | DROP HEIGHT      | SPECIFY YOUR DROP HEIGHT |
|  | Matching Finish | 34,5 – 39 in     | <b>000 CM</b>            |
|                                                                                  |                 | 39,5 – 78,5 in   |                          |
|                                                                                  |                 | 79 – 118 in      |                          |
|                                                                                  |                 | 118,5 – 157,5 in |                          |
|                                                                                  |                 | up to 393,5 in   |                          |

## STEP 4: CANOPY

| Type of Canopy                                                                     | FINISH                                               | CODE WITH DIMMABLE STANDARD |                                                                       |
|------------------------------------------------------------------------------------|------------------------------------------------------|-----------------------------|-----------------------------------------------------------------------|
|                                                                                    |                                                      | Phasecut                    | 0-10 Volt<br>Alternative dimming standard, if required by electrician |
|  | 1 Canopy: W54xD14xH2 in<br>Driver position: Built-in | White (9016)                | WH1380BP                                                              |
|                                                                                    |                                                      | Brushed Brass               | BR1380BP                                                              |
|                                                                                    |                                                      | Brushed Bronze              | BZ1380BP                                                              |
|                                                                                    |                                                      | Blackened Brass             | BK1380BP                                                              |
|                                                                                    |                                                      | Brushed Nickel              | NK1380BP                                                              |
|                                                                                    |                                                      | Polished Nickel             | PN1380BP                                                              |
|                                                                                    |                                                      |                             | WH1380BV                                                              |
|                                                                                    |                                                      |                             | BR1380BV                                                              |
|                                                                                    |                                                      |                             | BZ1380BV                                                              |
|                                                                                    |                                                      |                             | BK1380BV                                                              |
|                                                                                    |                                                      |                             | NK1380BV                                                              |
|                                                                                    |                                                      |                             | PN1380BV                                                              |

Custom colours (RAL Classic): availability and price upon request

# Bolle Wall 04

BTWA04

IP20

MATERIALS

Hand-blown transparent borosilicate glass and hand-finished or electroplated brass

WEIGHT INCL. CANOPY

Max 4.5 lbs

POWER INPUT

110-120V 50-60Hz

LIGHT SOURCE (INCLUDED)

Proprietary Softspot50 LED, 9W, 380 Lumens, 2700K warm white. CRI>95. 50% downwards and 50% upwards.




BOLLE WALL 04

CONFIGURATION

VERSION

SIZE (UNIT: IN)

Bolle Wall 04  
BTWA04

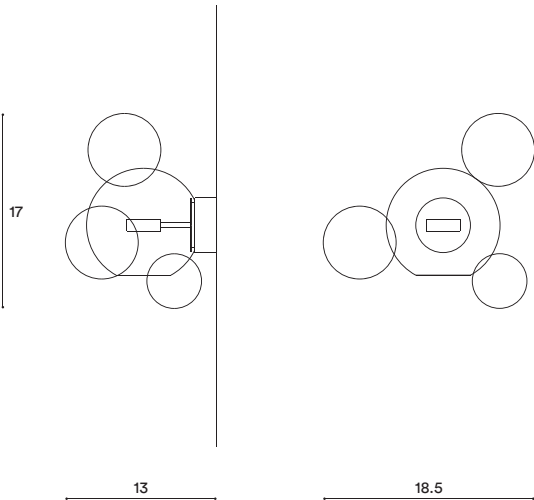

STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)

|                                                                                    |                                                                                     |                                                                                      |                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Brushed Brass<br>BR                                                                | Brushed Bronze<br>BZ                                                                | Blackened Brass<br>BK                                                                | Brushed Nickel<br>NK                                                                  |

STEP 2: GLASS COLOUR



Transparent  
**TR**



Iridescent  
**IR**



Blushed Gold  
**BO**



Blushed Sand  
**SD**



Blushed Peach  
**PC**



Blushed Light Green  
**LG**



Blushed Light Blue  
**LB**



Blushed Smokey Grey  
**BG**

STEP 3: CANOPY

Type of Canopy

FINISH

CODE WITH DIMMABLE STANDARD

Phasecut

0-10 Volt

Alternative dimming standard, if  
required by electrician



1 Canopy: Ø5×H2 in  
Driver position: Built-in

Brushed Brass  
Brushed Bronze  
Blackened Brass  
Brushed Nickel

BR120BP  
BZ120BP  
BK120BP  
NK120BP

BR120BV  
BZ120BV  
BK120BV  
NK120BV

Custom colours (RAL Classic): availability and price upon request

# Bolle Floor 06

BTFR06

IP20

MATERIALS

Hand-blown transparent borosilicate glass and hand-finished or electroplated brass

WEIGHT INCL. CANOPY

Max 24.2 lbs

POWER INPUT

Two poles US power plug with power supply 110-120V 60Hz installed on the base.

LIGHT SOURCE (INCLUDED)

Proprietary Softspot75 LED, 9W, 380 Lumens, 2700K warm white. CRI>95. 50% downwards and 50% upwards




BOLLE FLOOR 06

CONFIGURATION

VERSION SIZE (UNIT: IN)

Bolle Floor 06  
BTFR06

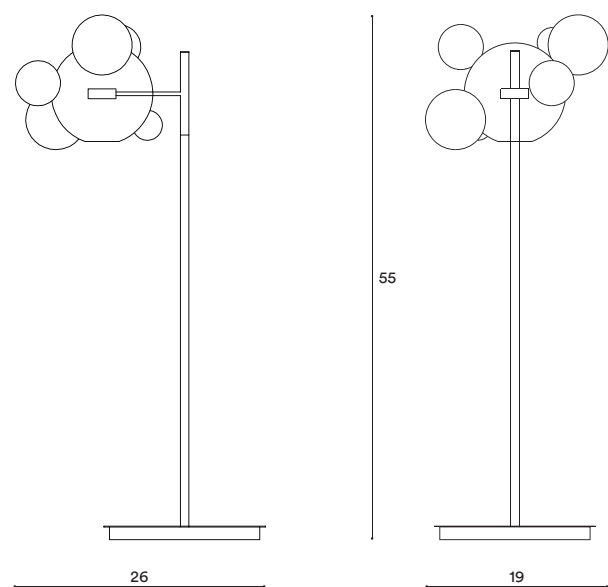

STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)



Brushed Brass  
BR



Brushed Bronze  
BZ



Blackened Brass  
BK



Brushed Nickel  
NK

STEP 2: GLASS COLOUR



Transparent  
TR



Iridescent  
IR



Blushed Gold  
BO



Blushed Sand  
SD



Blushed Peach  
PC



Blushed Light Green  
LG



Blushed Light Blue  
LB



Blushed Smokey Grey  
BG

# Soffio Pendant

STPE



MATERIALS

Hand-blown transparent borosilicate glass, hand-finished or electroplated brass

WEIGHT INCL. CANOPY


Max 5.5 lbs

POWER INPUT

110-120V 50-60Hz

LIGHT SOURCE (INCLUDED)

Proprietary Softspot75 LED, 9W, 380 Lumens, 2700K warm white. CRI>95. 75% downwards and 25% upwards

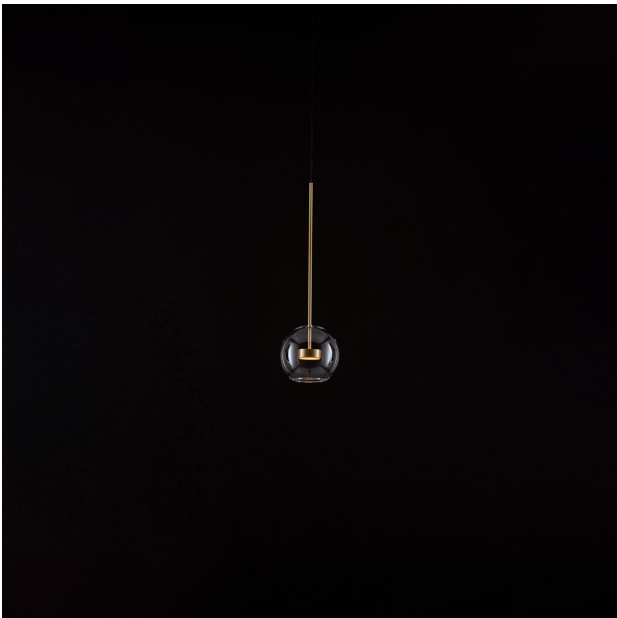

SOFFIO PENDANT 18

CONFIGURATION




STEP 1: VERSION

SIZE (UNIT: IN)

Soffio Pendant 18  
STPE18

Soffio Pendant 27  
STPE27

Soffio Pendant 35  
STPE35

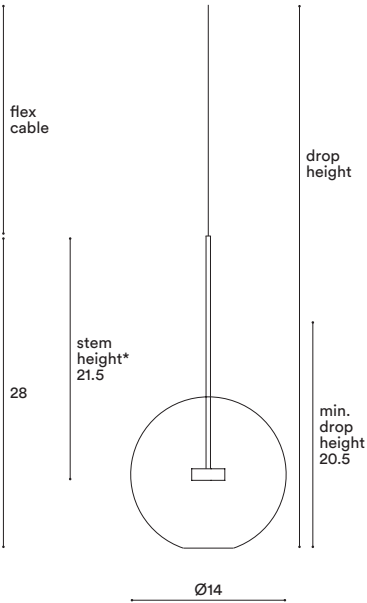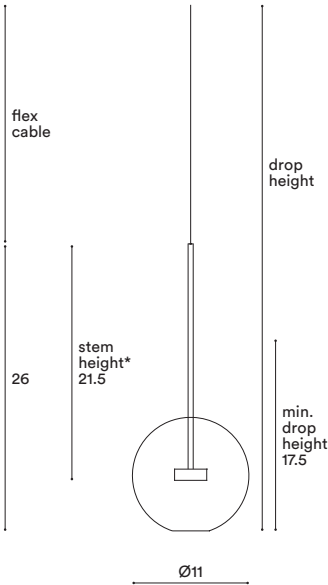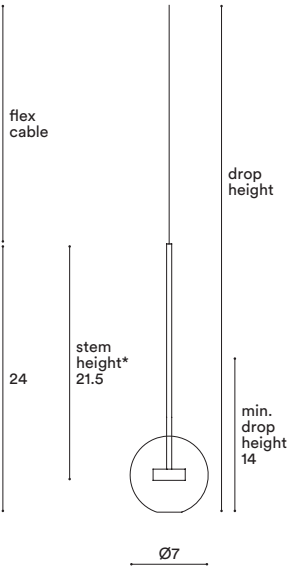

*\*Custom Stem Height available upon request*

STEP 2: METAL FINISHES (INCLUDED IN STARTING PRICE)



Brushed Brass  
BR



Brushed Bronze  
BZ



Blackened Brass  
BK



Brushed Nickel  
NK



Polished Nickel  
PN

### STEP 3: GLASS COLOUR



Transparent  
**TR**



Iridescent  
**IR**



Blushed Gold  
**BO**



Blushed Sand  
**SD**



Blushed Peach  
**PC**



Blushed Light Green  
**LG**



Blushed Light Blue  
**LB**



Blushed Smokey Grey  
**BG**

### STEP 4: SUSPENSION (Fabric flex cable or Metal Tube (39 in modules))

| FABRIC FLEX CABLE                                                                 | FINISH          | DROP HEIGHT      | CODE                     |
|-----------------------------------------------------------------------------------|-----------------|------------------|--------------------------|
|   | Black           | Max 157,5 in     | 04B                      |
|                                                                                   |                 | Max 394 in       | 10B                      |
|   | White           | Max 157,5 in     | 04W                      |
|                                                                                   |                 | Max 394 in       | 10W                      |
| METAL TUBE (39 IN MODULES)                                                        | FINISH          | DROP HEIGHT      | SPECIFY YOUR DROP HEIGHT |
|  | Matching Finish | Min* – 39 in     | 000 CM                   |
|                                                                                   |                 | 39,5 – 78,5 in   |                          |
|                                                                                   |                 | 79 – 118 in      |                          |
|                                                                                   |                 | 118,5 – 157,5 in |                          |
|                                                                                   |                 | up to 393,5 in   |                          |

\*Refer to Minimum Drop Height on previous page

### STEP 5: CANOPY

| Type of Canopy                                                                     | FINISH                                                                 | CODE WITH DIMMABLE STANDARD |                                                                          |
|------------------------------------------------------------------------------------|------------------------------------------------------------------------|-----------------------------|--------------------------------------------------------------------------|
|  | 1 Canopy: Ø5.5×H2 in<br>Ceiling Type: All<br>Driver position: Built-in | Phasecut                    | 0-10 Volt<br>Alternative dimming standard, if<br>required by electrician |
|                                                                                    |                                                                        | Black (9005)                | BL135BP                                                                  |
|                                                                                    |                                                                        | White (9016)                | WH135BP                                                                  |
|                                                                                    |                                                                        | Brushed Brass               | BR135BP                                                                  |
|                                                                                    |                                                                        | Brushed Bronze              | BZ135BP                                                                  |
|                                                                                    |                                                                        | Blackened Brass             | BK135BP                                                                  |
|                                                                                    |                                                                        | Brushed Nickel              | NK135BP                                                                  |
|                                                                                    |                                                                        | Polished Nickel             | PN135BP                                                                  |
|                                                                                    |                                                                        |                             | BL135BV                                                                  |
|                                                                                    |                                                                        |                             | WH135BV                                                                  |
|                                                                                    |                                                                        |                             | BR135BV                                                                  |
|                                                                                    |                                                                        |                             | BZ135BV                                                                  |
|                                                                                    |                                                                        |                             | BK135BV                                                                  |
|                                                                                    |                                                                        |                             | NK135BV                                                                  |
|                                                                                    |                                                                        |                             | PN135BV                                                                  |

Custom colours (RAL Classic): availability and price upon request

# Soffio Wall Horizontal

STWAHR



MATERIALS

Hand-blown transparent borosilicate glass, hand-finished or electroplated brass

WEIGHT INCL. CANOPY

Max 4.5 lbs

POWER INPUT

110-120V 50-60Hz

LIGHT SOURCE (INCLUDED)

Proprietary Softspot50 LED, 9W, 380 Lumens, 2700K warm white. CRI>95. 50% downwards and 50% upwards.



SOFFIO WALL HORIZONTAL 20


CONFIGURATION

STEP 1: VERSION

SIZE (UNIT: IN)

Soffio Wall Horizontal 20  
STWAHR20

Soffio Wall Horizontal 25  
STWAHR25

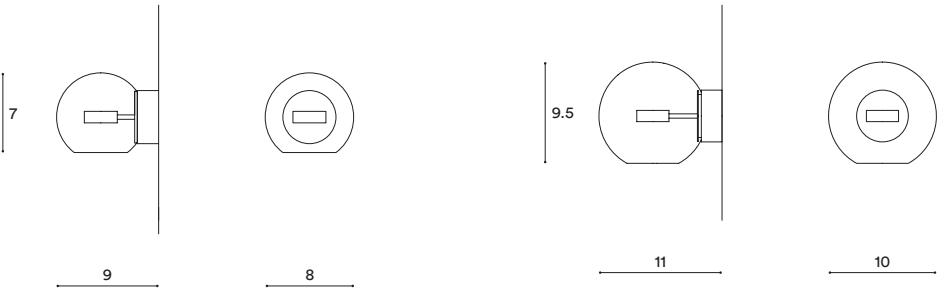

STEP 2: METAL FINISHES (INCLUDED IN STARTING PRICE)



Brushed Brass  
BR



Brushed Bronze  
BZ



Blackened Brass  
BK



Brushed Nickel  
NK

STEP 2: GLASS COLOUR



Transparent  
**TR**



Iridescent  
**IR**



Blushed Gold  
**BO**



Blushed Sand  
**SD**



Blushed Peach  
**PC**



Blushed Light Green  
**LG**



Blushed Light Blue  
**LB**



Blushed Smokey Grey  
**BG**

STEP 3: CANOPY

Type of Canopy

FINISH

CODE WITH DIMMABLE STANDARD

Phasecut

0-10 Volt

Alternative dimming standard, if  
required by electrician



1 Canopy: Ø5×H2 in  
Driver position: Built-in

Brushed Brass  
Brushed Bronze  
Blackened Brass  
Brushed Nickel

BR120BP  
BZ120BP  
BK120BP  
NK120BP

BR120BV  
BZ120BV  
BK120BV  
NK120BV

Custom colours (RAL Classic): availability and price upon request

# Soffio Wall Vertical 18

STWAVR18



**MATERIALS**

Hand-blown transparent borosilicate glass, hand-finished or electroplated brass

**WEIGHT INCL. CANOPY**

Max 4.5 lbs

**POWER INPUT**

110-120V 50-60Hz

**LIGHT SOURCE (INCLUDED)**

Proprietary Softspot75 LED, 9W, 380 Lumens, 2700K warm white. CRI>95. 75% downwards and 25% upwards




SOFFIO WALL VERTICAL 18

CONFIGURATION

VERSION SIZE (UNIT: IN)

Soffio Wall Vertical 18

STWAVR18

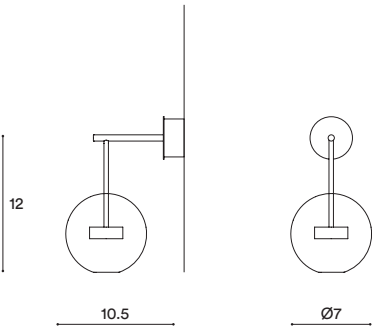

STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)

|                                                                                    |                                                                                     |                                                                                      |                                                                                       |
|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|  |  |  |  |
| Brushed Brass<br>BR                                                                | Brushed Bronze<br>BZ                                                                | Blackened Brass<br>BK                                                                | Brushed Nickel<br>NK                                                                  |

STEP 2: GLASS COLOUR



Transparent  
**TR**



Iridescent  
**IR**



Blushed Gold  
**BO**



Blushed Sand  
**SD**



Blushed Peach  
**PC**



Blushed Light Green  
**LG**



Blushed Light Blue  
**LB**



Blushed Smokey Grey  
**BG**

STEP 3: CANOPY

Type of Canopy


FINISH

CODE WITH DIMMABLE STANDARD

Phasecut

0-10 Volt

Alternative dimming standard, if  
required by electrician

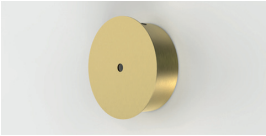

1 Canopy: Ø5.5×H2 in  
Driver position: Built-in

Brushed Brass  
Brushed Bronze  
Blackened Brass  
Brushed Nickel

BR135BP  
BZ135BP  
BK135BP  
NK135BP

BR135BV  
BZ135BV  
BK135BV  
NK135BV

Custom colours (RAL Classic): availability and price upon request

# Soffio Floor

STFR

IP20

MATERIALS

Hand-blown transparent borosilicate glass, hand-finished or electroplated brass and marble

WEIGHT INCL. CANOPY

Max 23.5 lbs

POWER INPUT

US power plug with power supply  
110-120V 60Hz installed on the base.  
Dimmable via foot switch included

LIGHT SOURCE (INCLUDED)

Proprietary Softspot75 LED,  
9W, 380 Lumens, 2700K warm white. CRI>95.  
25% downwards and 75% upwards



SOFFIO FL00R 140


CONFIGURATION

STEP 1: VERSION

SIZE (UNIT: IN)

Soffio Floor 140  
STFR140

Soffio Floor 170  
STFR170

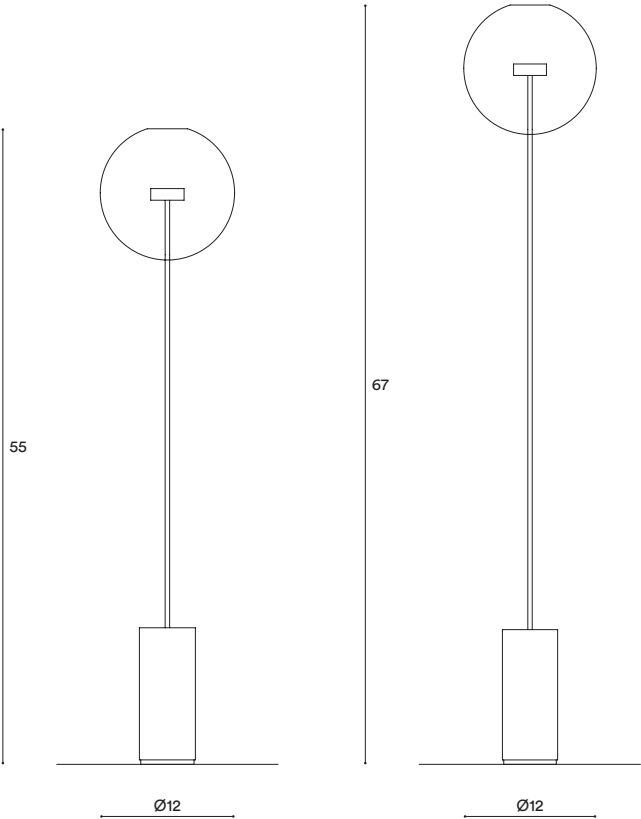

STEP 2: METAL FINISHES (INCLUDED IN STARTING PRICE)



Brushed Brass  
BR



Brushed Bronze  
BZ



Blackened Brass  
BK



Brushed Nickel  
NK

STEP 2: GLASS COLOUR



Transparent  
TR



Iridescent  
IR



Blushed Gold  
BO



Blushed Sand  
SD



Blushed Peach  
PC



Blushed Light Green  
LG




Blushed Light Blue  
LB




Blushed Smokey Grey  
BG

STEP 3: MARBLE BASE TYPE



Black Marquina  
BM



White Statuario  
WS



Classic Travertine  
CT

# Soffio Table 30

STTA30



**MATERIALS**

Hand-blown transparent borosilicate glass, hand-finished or electroplated brass and marble

**WEIGHT INCL. CANOPY**

Max 22 lbs

**POWER INPUT**

US power plug with power supply  
110-120V 60Hz installed on the base.  
Dimmable via foot switch included

**LIGHT SOURCE (INCLUDED)**

Proprietary Softspot75 LED,  
9W, 380 Lumens, 2700K warm white. CRI>95.  
25% downwards and 75% upwards




SOFFIO TABLE 30

CONFIGURATION

VERSION SIZE (UNIT: IN)

Soffio Table 30

STTA30

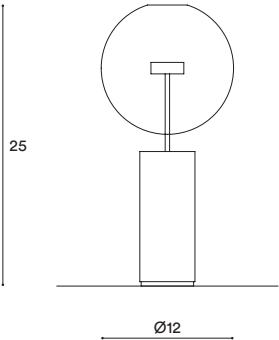

STEP 1: METAL FINISHES (INCLUDED IN STARTING PRICE)



Brushed Brass  
BR



Brushed Bronze  
BZ



Blackened Brass  
BK



Brushed Nickel  
NK

STEP 2: GLASS COLOUR



Transparent  
TR



Iridescent  
IR



Blushed Gold  
BO



Blushed Sand  
SD



Blushed Peach  
PC



Blushed Light Green  
LG




Blushed Light Blue  
LB




Blushed Smokey Grey  
BG

STEP 3: MARBLE BASE TYPE



Black Marquina  
BM



White Statuario  
WS



Classic Travertine  
CT



TECHNICAL DRAWINGS ARE NOT TO SCALE.

**Artisanal Production:** Glass is hand blown without moulds and may vary in size, colour and Weight incl. canopy. Glass may contain small imperfections that are proof of traditional production methods.

**Installation:** Giopato & Coombes recommends mounting power supplies remotely of all ceiling, chandelier, pendant and wall fixtures in an accessible and hidden location nearby for ease of long-term maintenance. Installation must be carried out by certified personnel.

**Flex Cable Suspension:** For Dewdrops, Bolle, Bolle Frosted, Flauti, Softspot, Soffio, Maehwa, Moonstone, Milky Way Pendants and Chandeliers - each installation will move even in a slight breeze. It is not recommended for windy interiors.


**Bolle Pendant and Chandelier:** Glass is hand blown without the assistance of moulds and so may vary in size and Weight incl. canopy, causing the bubbles to hang off balance.

**Bolle, Soffio and Soffio Frosted Floor and Table:** To ensure safe shipping, electrical wiring and assembly of glass components are required.

**Dewdrops Chandelier:** Every glass sphere is hand-made and may therefore be slightly different from each other. We weigh each sphere to ensure that the composition is as balanced as possible.

Extra Drop height kit

Only available for Gem collection, as an alternative to custom drop height. Allows adjusting drop height on site by combining five tubes of different length.

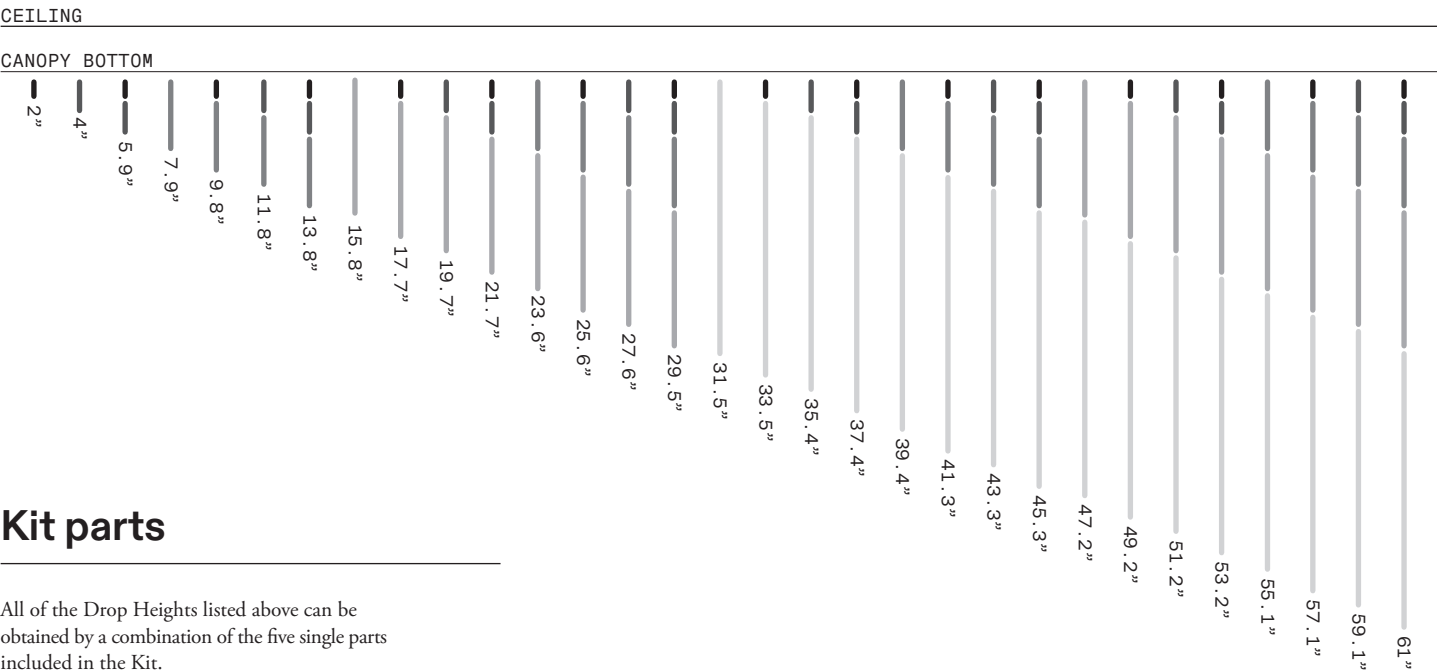

Kit parts

All of the Drop Heights listed above can be obtained by a combination of the five single parts included in the Kit.

|            |    |                                                                                     |
|------------|----|-------------------------------------------------------------------------------------|
| 2" TUBE    | 1X |  |
| 4" TUBE    | 1X |  |
| 7.9" TUBE  | 1X |  |
| 15.8" TUBE | 1X |  |
| 31.5" TUBE | 1X |  |

**These General Terms and Conditions (hereinafter “General Conditions”) will apply to all supplies of products by Giopato & Coombes S.r.l., with head offices in Viale Gian Giacomo Felissent, 116, Treviso, Italy. C.F./V.A.T. Number IT04408130260 (hereinafter G&C or the “Supplier”).**

**The term “Customer” means the company or the individual that orders the products and is the addressee of the Supplier’s invoice.**

**ART. 1. OGGETTO E AMBITO DI APPLICAZIONE.**

Le presenti Condizioni generali di vendita, in seguito solo “Condizioni” regolamentano e si applicano alle forniture di beni di G&C quali uniche efficaci condizioni a disciplinare il rapporto con il Cliente, prevalendo su eventuali condizioni generali o particolari di questi. Il Cliente rinuncia all'applicazione delle proprie eventuali condizioni generali e particolari di acquisto, in ogni caso prive di efficacia nei rapporti con G&C.

L'accettazione scritta da parte del Cliente dell'offerta di fornitura in forza della quale G&C inizierà l'esecuzione della lavorazione o effettuerà la consegna costituisce accettazione espressa anche delle presenti Condizioni così come l'accettazione della fornitura rende implicita l'accettazione di tutte le condizioni.

Le presenti Condizioni trovano applicazione in tutti i rapporti di fornitura anche se non richiamate negli specifici documenti contrattuali.

La fornitura è disciplinata, oltre alle presenti Condizioni, dalle schede tecniche, dai disegni e dai documenti in essi richiamati.

Per quanto non richiamato, si applica la disciplina del codice civile italiano in materia di compravendita.

**ART. 2. CONCLUSIONE DEL CONTRATTO.**

Il Contratto è concluso nel momento in cui G&C ha notizia che l'offerta di fornitura inviata al Cliente è stata da questi accettata con conferma d'ordine scritta. Le richieste d'ordine inviate a G&C non sono vincolanti fino alla loro completa ed integrale accettazione da parte di G&C.

**ART. 3. CONTENUTO DELL'OFFERTA O DELL'ACCETTAZIONE DELLA CONFERMA D'ORDINE.**

I beni, descritti per tipologia e quantità, saranno indicati unitamente a tutti gli altri elementi della fornitura, nell'offerta di G&C, poi confermata dal Cliente, con l'indicazione dei tempi di consegna, delle specifiche tecniche e di ogni altro elemento reputato utile ai fini della fornitura.

**ART. 4. PREZZO E MODALITÀ DI PAGAMENTO.**

Il prezzo di vendita e l'anticipo che il Cliente dovrà corrispondere alla conferma d'ordine sono indicati nell'offerta di fornitura di G&C, poi accettata dal Cliente. Salvo diverso accordo, i prezzi potranno essere soggetti a revisione e variazione in funzione della variazione del costo di realizzazione della merce (a titolo meramente indicativo e non esaustivo, per materie prime, manodopera, energia, imballaggio, percentuali fisse).

Ogni obbligazione di G&C nella fornitura dei beni, inteso in particolar modo l'obbligo di avvio dell'esecuzione dell'ordine scritto e della consegna sono subordinate al versamento da parte del Cliente del prezzo di acquisto dei beni così come indicato e quantificato dettagliatamente nell'offerta di fornitura di G&C. G&C non sarà quindi in alcun modo responsabile per ritardi nella consegna se tali ritardi sono dovuti al mancato adempimento dell'obbligo di versamento del prezzo, che costituisce condizione per la decorrenza dell'esecuzione del contratto.

**ART. 5. TRASFERIMENTO DELLA MERCE E TERMINE DI CONSEGNA. RISERVA DI PROPRIETÀ.**

Nei casi in cui la consegna sia EXW o FCA G&C consegna la merce mettendola a disposizione del Cliente presso il proprio stabilimento o rimettendola al vettore scelto dal Cliente, che sosterrà tutte le spese di trasporto perché la merce giunga nella destinazione finale.

Dal momento della messa a disposizione della merce presso il proprio stabilimento ovvero dalla consegna al vettore il Cliente sopporterà tutti i rischi di perdita, avaria

**ART. 1. OBJECT AND SCOPE OF APPLICATION.**

These General Sale Conditions, hereinafter referred to as “Conditions”, govern and apply to the supply of G&C goods as the only effective conditions governing the relationship with the Customer, prevailing over any general or conditions of these.

The Customer waives the application of his general and purchase-conditions, in any case ineffective in relations with G&C.

Written acceptance by the Customer of the supply offer in force of which G&C will start the execution of the manufacture or carry out the delivery also constitutes express acceptance of these Conditions as well as the acceptance of the supply implies the acceptance of all conditions.

These Conditions are applied to all supply relationships even if not referred to in the specific contractual documents.

The supply is governed, in addition to these Conditions, by the technical data sheets, drawings and documents referred to therein.

Although not mentioned, the provisions of the Italian civil code will be applied.

**ART. 2. CONCLUSION OF THE CONTRACT.**

The Contract is concluded when G&C is informed that the supply offer has been accepted by the Customer by written order confirmation. Purchase order sent to G&C are not binding until their complete and integral acceptance by G&C.

**ART. 3. CONTENT OF THE OFFER OR OF THE ACCEPTANCE OF THE ORDER CONFIRMATION.**

The goods, described by type and quantity, will be indicated together with all the other elements of the supply, in G&C's offer, then confirmed by the Customer, with indication of delivery date, technical specifications and any other element deemed useful for the purpose of the supply.

**ART. 4. PRICE AND PAYMENT METHODS.**

The sale price and the advance payment that the Customer shall pay with the order confirmation are indicated in G&C's supply offer, which is then accepted by the Customer. Unless otherwise agreed, the prices may be subject to revision and variation according to the variation of the manufacturing costs of the goods (merely indicative and not exhaustive, as for raw materials, labour, energy, packaging, fixed percentages).

All obligations of G&C in the supply of goods, understood the obligation to start the execution of the written order and delivery are subject to payment by the Customer at the purchase price of the goods as indicated and quantified in detail in the G&C supply offer. G&C will therefore not be responsible in any way for delays in deliveries if such delays are due to failure to fulfill the obligation to pay the price, which is a condition for the start of the execution of the contract.

**ART. 5. TRANSFER OF GOODS AND DELIVERY TERM. RETENTION OF TITLE.**

In cases where the delivery is EXW or FCA, G&C delivers the goods by placing them at the disposal of the Customer at its owned factory or at the forwarder chosen by the Customer, who will bear all the transport costs for the goods till the destination. From the moment the goods are made available at its owned factory or at forwarder, the Customer will bear all risks of loss, or damage to the goods, even if dependent on transport. The delivery term for G&C can never be considered mandatory and essential. G&C will keep the Customer informed in advance of delivery times, shipment of the goods and any other fact deemed necessary for the purpose of the supply. In case that G&C agrees to deliver the goods as an exception before having first received the full payment of the price, the ownership of the goods will pass to the Customer

o danno alla merce, anche se dipendenti dal trasporto.

Il termine di consegna per G&C non potrà mai considerarsi tassativo ed essenziale. G&C terrà preventivamente informato il Cliente sui tempi di consegna, sulla spedizione della merce e su ogni altro fatto ritenuto necessario ai fini della fornitura. Laddove G&C accordasse la consegna della merce in via di eccezione senza avere ricevuto prima il versamento integrale del prezzo, la proprietà della merce passerà al Cliente solo al momento dell'integrale pagamento. In tali casi il Cliente dovrà adottare tutte le misure possibili per garantire la conservazione e l'integrità dei beni, stipulando idonea polizza assicurativa di cui fornirà copia a G&C.

#### ART. 6. SPEDIZIONI

La spedizione delle merci avrà luogo dai locali o dal magazzino di G&C, salvo diversi accordi fra le Parti. Salvo sia diversamente concordato, il Cliente sarà responsabile dell'organizzazione del trasporto e dei relativi costi.

Tutti i rischi sul Prodotto saranno trasferiti al Cliente al momento della spedizione. G&C, terrà informato il Cliente circa le date di spedizione comunicando al Cliente quelle disponibili.

Se il Cliente ritarda di organizzare la spedizione rispetto alle date concordate, dovrà rimborsare G&C, di tutti i danni e costi sopportati, quali gli extra costi per il magazzino, le movimentazioni, l'assicurazione ed il trasporto.

#### ART. 7. OBBLIGAZIONI E DICHIARAZIONI DI G&C.

I beni consegnati da G&C rispetteranno le caratteristiche qualitative e quantitative di cui all'offerta accettata dal Cliente e saranno soggetti a garanzia di 12 (dodici) mesi a partire dalla data della iniziale consegna, che viene aumentata di ulteriori 12 (dodici) mesi per i mercati Europeo, Svizzera e Uk. Tale garanzia si applicherà anche ai beni sostituiti o riparati.

In caso di contestazioni del Cliente per ritenuti vizi, difetti o non conformità dei prodotti, il Cliente dovrà darne comunicazione scritta al seguente indirizzo [support@giopatocoombes.com](mailto:support@giopatocoombes.com) entro il termine di 8 (otto) giorni dalla scoperta e dovrà consentire a G&C di poter ispezionare i prodotti. In difetto di comunicazione da parte del Cliente entro il termine indicato, quest'ultimo decadrà da qualunque pretesa, eccezione o richiesta. La comunicazione di contestazione del prodotto dovrà essere corredata da fotografie e documenti utili a consentire a G&C la verifica in contraddittorio. G&C potrà sostituire a proprie spese il prodotto o parti di esso in caso di contestazioni del Cliente ma non risponderà in ipotesi di problematiche dovute ad un errato montaggio o installazione dei prodotti senza il rigoroso rispetto delle schede tecniche, del manuale di installazione, delle regole dell'arte ovvero in ogni caso in cui non siano state rigorosamente rispettate dal Cliente le indicazioni sui prodotti, sull'ambiente ove andranno inseriti e su ogni altro aspetto che possa essere rilevante ai fini dell'installazione o della conservazione.

La restituzione dei beni non è consentita, salvo autorizzazione scritta di G&C. In questo caso i beni saranno spediti a rischio e spese del cliente, in perfette condizioni e nell'originale imballaggio. In questo caso i beni saranno accreditati con la trattenuta del 20% sul valore netto fatturato per coprire il ricondizionamento e i costi di trasporto.

#### ART. 8. OBBLIGAZIONI E DICHIARAZIONI DEL CLIENTE.

Il rispetto dei termini e modalità di pagamento dei beni dovrà essere rigoroso da parte del Cliente così come indicato nell'offerta di fornitura. Il ritardo anche di un solo giorno darà titolo a G&C di sospendere la fornitura secondo la previsione di cui all'art. 4 ovvero di risolvere di diritto il contratto ai sensi validità del contratto. Il Cliente dovrà mantenere strettamente confidenziali le informazioni e non dovrà utilizzarle e comunicarle per scopi diversi o al di fuori di quanto previsto dal contratto, fatta eccezione per il proprio personale e per eventuali revisori e soggetti ai quali competano funzioni di controllo e vigilanza e, comunque, nei limiti di quanto strettamente necessario.

#### ART. 9. FORZA MAGGIORE.

Si ha forza maggiore in qualunque ipotesi in cui la fornitura sia ritardata, impedita od ostacolata da eventi non dipendenti dalla volontà o al di fuori del controllo delle Parti, quali ad esempio, azioni od omissioni di autorità governative o pubbliche, disordini civili, scioperi o vertenze sindacali, blocchi od embarghi, interruzioni nella fornitura di energia elettrica o di carburante, inondazioni, disastri naturali, epidemie e/o pandemie, mancata consegna delle materie prime reperibili sul mercato nazionale. In tali casi la fornitura si intenderà sospesa per un periodo equivalente alla durata della causa di forza maggiore e la necessità di ripristino, con onere della parte interessata dal fatto di inviare comunicazione scritta motivata all'altra parte confermata dalla locale camera di commercio o atto equipollente. Se la sospensione si protrarrà per più di sei

only with the full payment. In such cases, the Customer must take all possible measures to guarantee the conservation and integrity of the goods, stipulating a suitable insurance policy of which he will provide a copy to G&C.

#### ART. 6. DELIVERY

The shipment of goods will take place from the premises or warehouse of G&C, unless otherwise agreed between the Parties. Unless otherwise agreed, the Customer shall be responsible for organizing the transport and related costs.

All risks regarding the Product will be transferred to the Customer at the time of shipment. G&C will keep the Customer informed about the shipment dates by notifying the available ones. If the Customer delays the previously agreed shipping/delivery date, it will reimburse G&C for all damages and costs such as extra storage, handling, insurance and transportation.

#### ART. 7. OBLIGATIONS AND DECLARATIONS OF G&C.

The goods delivered by G&C will comply with the qualitative and quantitative characteristics specified in the offer accepted by the Customer and will be subject to a warranty period of 12 (twelve) months from the date of the initial delivery, which is extended by an additional 12 (twelve) months for the European, Swiss, and UK markets. This warranty will also apply to replaced or repaired goods. In the event of complaints from the Customer for alleged faults, defects or non-conformities of the products, the Customer must give written notice to the following address [support@giopatocoombes.com](mailto:support@giopatocoombes.com) within 8 (eight) days from the discovery and must allow G&C to inspect the products. In the lack of communication by the Customer within the above-mentioned term, the latter will forfeit any dispute, objection, or request. The claim communication of the product must be accompanied by photographs and documents helpful to allow G&C to verify it jointly.

G&C will be able to replace the product or parts of it at its own expense in the event of disputes from the Customer but will not respond in the event of problems due to incorrect assembly or installation of the products without strict compliance with the technical data sheets, the installation manual, the rules of state art or in any case in which the indications on the products, on the environment where they will be installed and on any other aspect conservation have not been strictly observed by the Customer. Returned goods will not be accepted unless authorisation of G&C in writing. In this case goods will be shipped at the customer's expenses and risk and only for unused goods, in perfect conditions and in original packaging. In this case the goods will be credited with the retention of 20% of the net value invoiced to cover reconditioning and transportation costs.

#### ART. 8. OBLIGATIONS AND DECLARATIONS OF THE CLIENT.

Compliance with the payment terms and conditions of the goods must be strictly observed by the Customer as indicated in the supply offer. A delay of even one day will entitle G&C to suspend the supply according to the provisions of art. 4 or to legally terminate the contract pursuant to art. 1456 of the Italian civil code at its sole discretion with the right to obtain compensation for the damages suffered. For no reason, not even in the event of dispute of the goods, the Customer will have the right to suspend payment of the goods.

#### ART. 9. FORCE MAJEURE.

There is force majeure in any case in which the supply is delayed, prevented or hindered by events not dependent on the will or beyond the control of the Parties, such as, for example, actions or omissions by government or public authorities, civil unrest, strikes or union disputes, blocks or embargoes, interruptions in the supply of electricity or fuel, floods, natural disasters, epidemics and/or pandemics, non-delivery of raw materials available on the national market. In such cases, the supply will be considered suspended for a period equivalent to the duration of the cause of force majeure and the need for restoration, with the responsibility of the interested party to send a motivated written communication to the other party confirmed by the local chamber of commerce or equivalent deed. If the suspension lasts for more than six months, each party may withdraw from the contract by giving written notice to the other party without the application of penalties.

#### ART. 10. INTELLECTUAL PROPERTY. CONFIDENTIALITY AND KNOWHOW.

All industrial and intellectual property rights on the products supplied belong exclusively to G&C which cannot be transferred to the customer or third parties in any way. It is forbidden to the Customer and third parties to make any modification, even marginal, to the products, even with references to the distinctive signs present on them. In any case of violation of this article, all damages suffered and pending must be compensated to G&C.

mesi, ciascuna parte potrà recedere dal contratto, dandone comunicazione scritta all'altra parte senza l'applicazione di penali.

**ART. 10. PROPRIETÀ INTELLETTUALE. RISERVATEZZA E KNOWHOW.**

Tutti i diritti di proprietà industriale e intellettuale sui prodotti forniti sono esclusivamente di G&C che non potranno essere in alcun modo ceduti al Cliente o a terze parti. È vietato al Cliente e a terze parti di apportare qualsiasi modifica, anche marginale, ai prodotti anche con riferimenti ai segni distintivi presenti sugli stessi. In ogni caso di violazione del presente articolo dovranno essere risarciti a G&C tutti i danni patiti e patienti.

Tutta la documentazione messa a disposizione da G&C al Cliente per l'esecuzione della fornitura, oltre a restare di esclusiva proprietà di G&C, è strettamente riservata e non potrà essere divulgata, copiata, riprodotta, ma solamente ed esclusivamente utilizzata dal Cliente per gli scopi della fornitura.

Il Cliente è tenuto alla massima riservatezza su tutte le notizie, i listini, i prodotti, le informazioni delle pratiche commerciali, l'organizzazione aziendale, il know-how, le tecniche, i piani commerciali e industriali di G&C ed ogni altra informazione conosciuta in virtù della fornitura; l'obbligo di riservatezza rimarrà anche oltre il termine di validità del contratto. Il Cliente dovrà mantenere strettamente confidenziali le informazioni e non dovrà utilizzarle e comunicarle per scopi diversi o al di fuori di quanto previsto dal contratto, fatta eccezione per il proprio personale e per eventuali revisori e soggetti ai quali competano funzioni di controllo e vigilanza e, comunque, nei limiti di quanto strettamente necessario.

**ART. 11. RECESSO DI G&C.**

G&C si riserva la facoltà di esercitare il recesso dal contratto di fornitura mediante comunicazione scritta da inviare al Cliente che sarà tenuto indenne dei costi sostenuti sino alla comunicazione di recesso. Il recesso potrà essere esercitato anche in caso di sottoposizione del Cliente a procedure concorsuali e in caso di modifiche societarie, quali fusioni, scissioni, cessioni di azienda o rami d'azienda.

**ART. 12. TRATTAMENTO DEI DATI PERSONALI.**

Le parti si dichiarano di essere informate e si prestano il reciproco consenso al trattamento dei rispettivi dati ai sensi del Testo unico della privacy ai sensi del D.Lgs. 196/2003 come eventualmente modificato o integrato e del regolamento UE 2016/679.

**ART. 13. DISPOSIZIONI FINALI.**

Salva diversa ed espressa disposizione, tutte le comunicazioni fra le parti dovranno essere effettuate per iscritto.

Eventuali modifiche alla fornitura avranno effetto solo se confermate per iscritto da G&C.

**ART. 14. CONTROVERSIE: FORO COMPETENTE E LEGGE APPLICABILE.**

Le controversie che dovessero sorgere fra le parti con riferimento all'applicazione delle presenti Condizioni e alla fornitura saranno devolute alla esclusiva giurisdizione del giudice italiano ovvero al Tribunale di Treviso o alla Sezione Specializzata in materia di impresa del Tribunale di Venezia.

La legge che norma le presenti Condizioni e che regolerà la fornitura sarà quella italiana.

In caso in cui la documentazione relativa alla fornitura sia redatta in più lingue, sarà data prevalenza in ogni caso a quella italiana ovvero, in mancanza, a quella inglese.

All the documentation made available by G&C to the Customer for the execution of the supply, besides remaining the exclusive property of G&C, is strictly confidential and cannot be disclosed, copied, reproduced, but only and exclusively used by the Customer for the purposes of supply.

The Customer is bound to the utmost confidentiality on all news, price lists, products, information on commercial practices, company organization, know-how, techniques, commercial and industrial plans of G&C and any other information known in force of the supply; the obligation of confidentiality will remain even beyond the term of validity of the contract. The Customer must keep the information strictly confidential and must not use and communicate it for different purposes or outside the provisions of the contract, except for its own personnel and any auditors and subjects responsible for control and supervisory functions and, in any case within the limits of what is strictly necessary.

**ART. 11. WITHDRAWAL OF G&C.**

G&C reserves the right to exercise the withdrawal from the supply contract by means of written communication to be sent to the Customer who will be held harmless of the costs incurred until the communication of withdrawal. The withdrawal may also be exercised in the event of the Customer bankruptcy proceedings and in the event of corporate changes of control, such as mergers, demergers, transfers of company or company branches.

**ART. 12. TREATMENT OF PERSONAL DATA.**

The parties declare that they are informed and give their mutual consent to the processing of their respective data pursuant to the Consolidated Privacy Act pursuant to Legislative Decree 196/2003 as possibly amended or supplemented and to EU regulation 2016/679.

**ART. 13. FINAL PROVISIONS.**

Unless otherwise expressly provided, all communications between the parties must be made in writing.

Any changes to the supply will only take effect if confirmed in writing by G&C.

**ART. 14. DISPUTES: JURISDICTION AND APPLICABLE LAW.**

Disputes that may arise between the parties with reference to the application of these Conditions and to the supply will be devolved to the exclusive jurisdiction of the Italian judge or to the Court of Treviso or to the Specialized Section in business matters of the Court of Venice.

The law that governs these Conditions and that will regulate the supply will be the Italian one.

If the documentation relating to the supply is drawn up in several languages, prevalence will in any case be given to the Italian one or, failing that, to the English one.

# GIOPATO&COOMBES

DATASHEET BOLLE COLOURED - NEW - IN  
NORTH AMERICA

2025

Giopato & Coombes S.r.l.

Viale G. G. Felissent, 116  
31100 – Treviso, Italia  
[giopatocoombes.com](http://giopatocoombes.com)

Tel: +39 0422 697997  
[instagram.com/giopatocoombes](https://www.instagram.com/giopatocoombes)  
[#supernaturaldaydream](https://www.instagram.com/giopatocoombes)

