

UPPER 250

WLUR250RC

SCONCE

Design by Yves Macheret

110V

SPECSHEET

INSTALLATION INSTRUCTIONS



ENTRELACS

HAND-MADE IN FRANCE

UPPER 250

WLUR250RC

SCONCE

Design by Yves Macheret



Hand-Made in France with passion
in our Family Foundry established in 1982



ENTRELACS

UPPER 250
WLUR250RC
SCONCE

Design by Yves Macheret

MATERIALS SOLID BRONZE & GLASS DIFFUSER

LED SOURCES COB LED 2X 9,3V

POWER SUPPLY 120-277 VAC - 50/60 Hz - 700mA

LUMENS 388

WATTS 2x 3W

WEIGHT KG (lbs) 7 (15.43)

STANDARD

LED	Class 2	CRI-Ra 98
Dry location	Damp location	Wet location
UL COMPONENTS ONLY	JBOX FITTING	

LED COLORS
NO UPCHARGE

2700K*	3000K	3500K
4000K		


DIMMING CONTROL

Triac phase cut*	0-10V*	Dali
------------------	--------	------

DRIVER POSITION

BUILD IN	BUILD IN	Remote
----------	----------	--------

*Standard setting

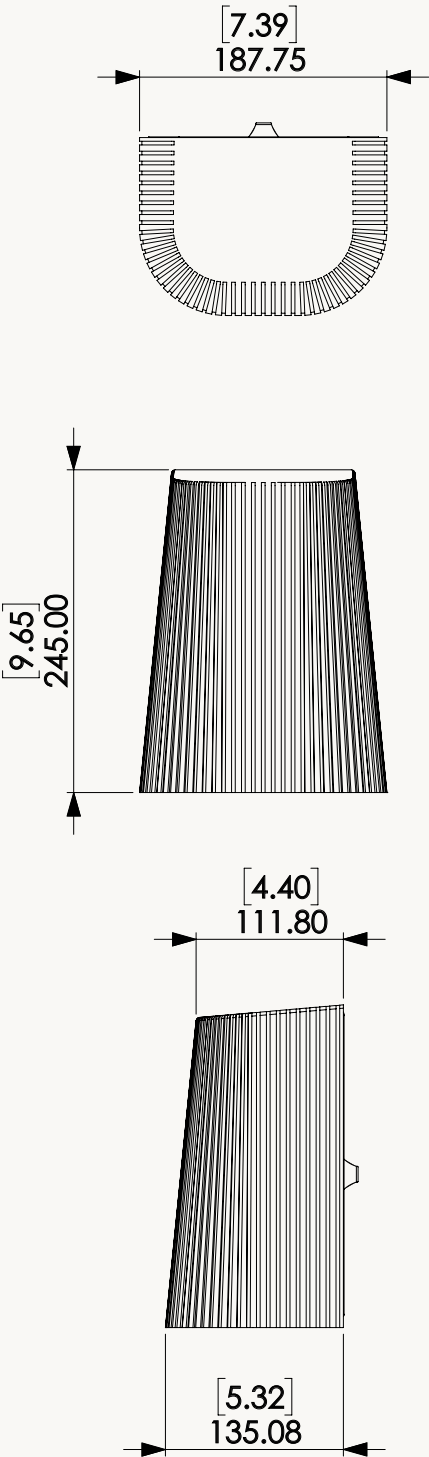

110V
SPEC SHEET

finishes

BRONZE PATINAS

FNRB RAW BRONZE	FNMB MEDIUM BRONZE	FNBK BLACK BRONZE

SPECIAL
UPCHARGE

FBNB BRUSHED NICKEL	CUSTOM FINISHING UPON REQUEST

GLASS DIFFUSER

SMOKED GLASS

Warranty and care instructions

You have just acquired an Entrelacs lighting fixture and we thank you.

All of our achievements are based on an exceptional know-how for more than 40 years. Made from cast bronze and alabaster, your fixture is designed to last a lifetime. The integrated electrical components were chosen for their manufacturing quality and their remarkable colors rendering.

Dismantling the luminaire is strictly prohibited to avoid the risk of electrocution and loss of warranty. The light source contained in this luminaire must

be replaced by us, or a similarly qualified person. For installation, please follow the installation instructions. If your luminaire has a flexible external cable or cord and it becomes damaged, it must be replaced by us or a person with similar qualifications. Alabaster is a fragile material and in the event of a crack or even breakage you must contact us to have it replaced.

All our lighting fixtures are guaranteed for 2 years.

Bronze does not require any special maintenance. However, in order to guarantee the protection of the patina, your lighting fixture is protected by a protective varnish. We invite you to follow some tips.

- cut off the power supply before any maintenance or cleaning operation
- do not use hydroalcoholic products such as glass surface cleaning products or others
- we do not recommend using liquid to clean it
- avoid direct exposure to the rays of the sun and the moon
- remove dust using a soft cloth

Compliance

This product complies with the requirements of Annex 1 DBT (decree 2015 - 1083 of August 27, 2015 relating to the making available on the market of electrical equipment intended to be used within certain voltage limits)

Electrical products must not be thrown out with domestic waste.

They must be taken to a communal collecting point for environmentally friendly disposal in accordance with the local regulations. Contact your local authorities or stockist for advice on recycling.



General safety instructions

Read the instruction manual thoroughly before using the appliance.

WARNING: When using electrical appliance, basic safety precautions should always be followed to reduce the risk of fire, electrical shock and personal injury. The power supply must be deactivated prior to assembly, maintenance, exchanging the light source or cleaning process.


ELECTRICAL SAFETY: the lighting should be installed by authorized electrician only.



ELECTRIC SHOCK RISK




SWITCH TO OFF

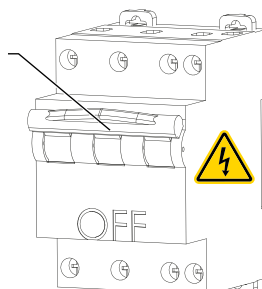


ENTRELACS

PHASE CUT / TRIAC / 0-10V
BUILD IN
DUAL DRIVER PROVIDED

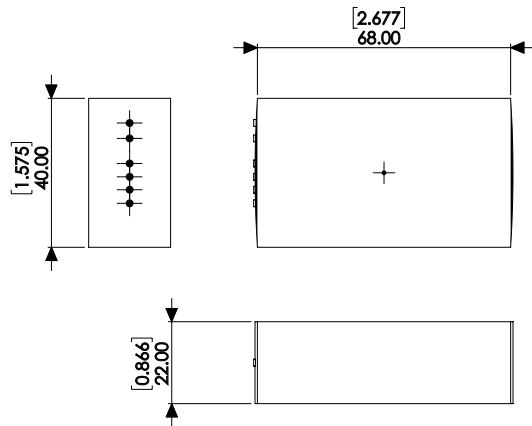

MANUFACTURER	LTF TECHNOLOGY
MODEL NUMBER	DS12W24VMB1UD
AC INPUT	120-277 VAC - 0.12A - 50/60Hz
DC OUTPUT	24V (CONSTANT VOLTAGE)
WATTS	12W
EFFICIENCY	>85%
POWER FACTOR	>0.95
CASE TC	90°C MAX
PROTECTION	INPUT / OUTPUT
STORAGE	-30°C / +90°C
HUMIDITY	95% RH MAX
IP RATING	IP 64
CLASS	CLASS 2 POWER SUPPLY
DIMMING	ELV, TRIAC, 0-10V


DALI
REMOTE DRIVER

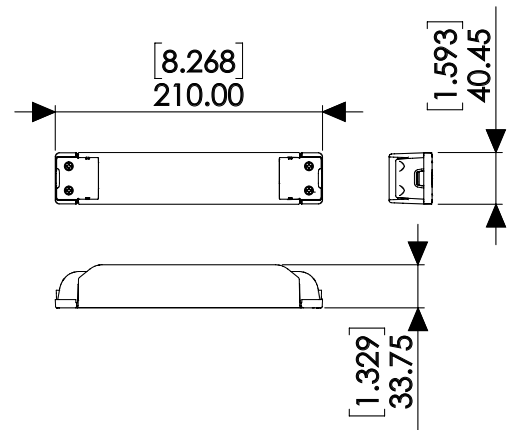

MANUFACTURER	ELDOLED
MODEL NUMBER	SL0360A6
AC INPUT	120-277 VAC - 0.35A - 50/60Hz
DC OUTPUT	< 60V - 700mA (CONSTANT CURRENT)
WATTS	30W
EFFICIENCY	>86%
POWER FACTOR	>0.94
CASE TC	85°C MAX
PROTECTION	INPUT / OUTPUT
STORAGE	-20°C / +50°C
HUMIDITY	90% RH MAX
IP RATING	IP20
CLASS	CLASS 2 POWER SUPPLY
DIMMING	DALI 2

UPPER 250
WLUR250RC
SCONCE

ASSEMBLY VIEW

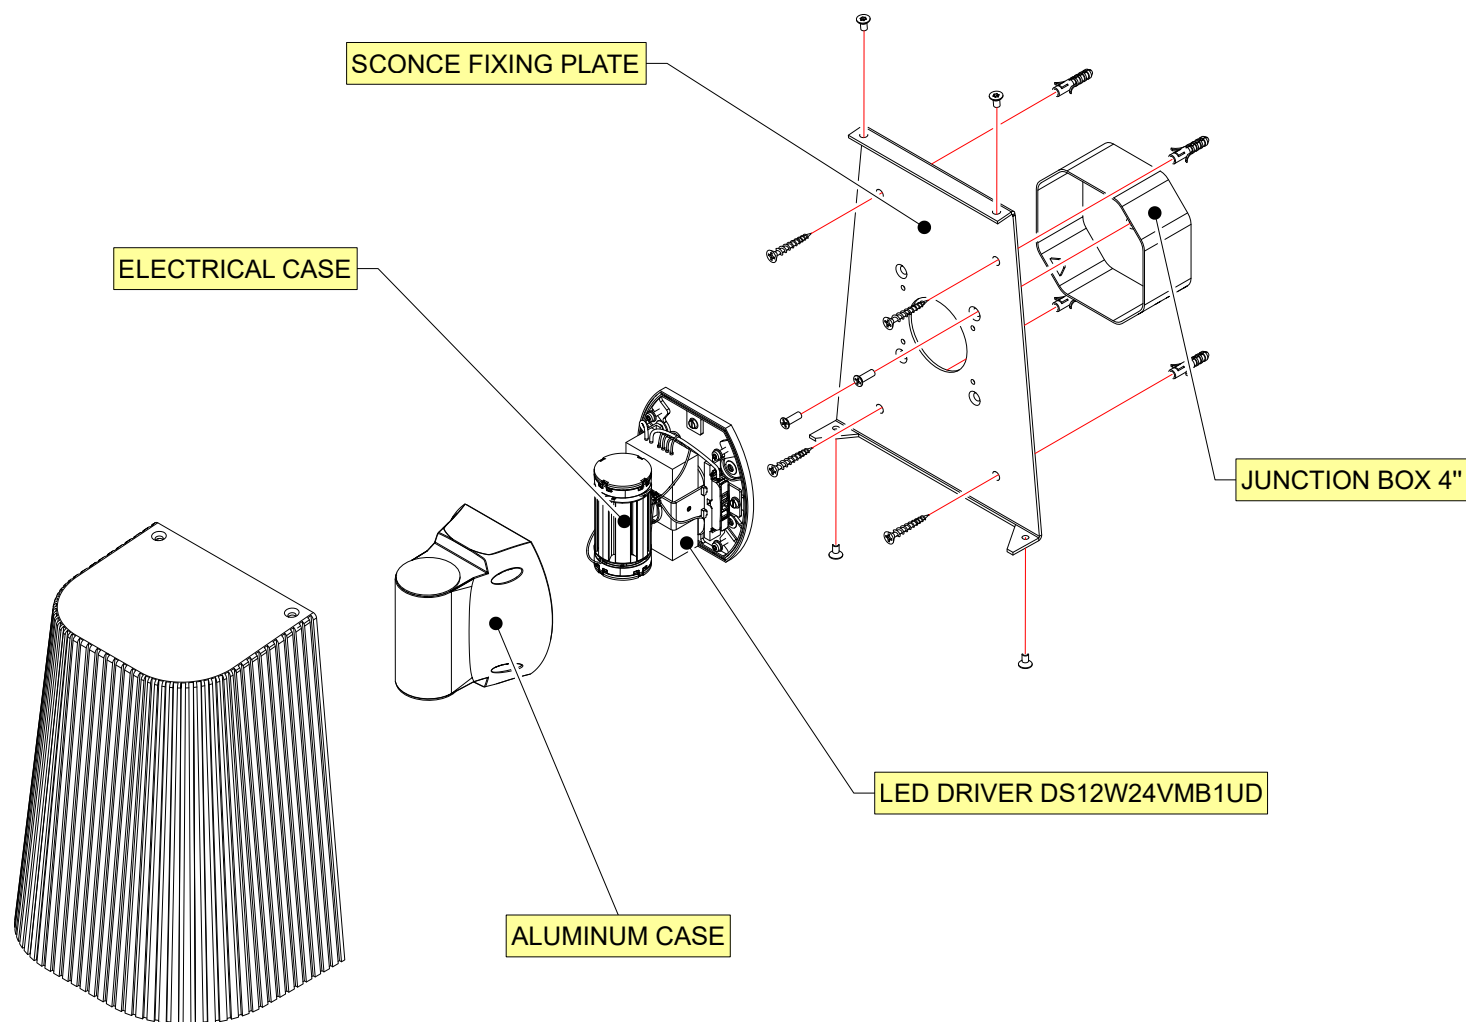

ANY HELP ?

support@entrelacs-creation.fr

WHATSAPP





ENTRELACS

UPPER 250
WLUR250RC
SCONCE

CONTENT

LIGHTING LABEL

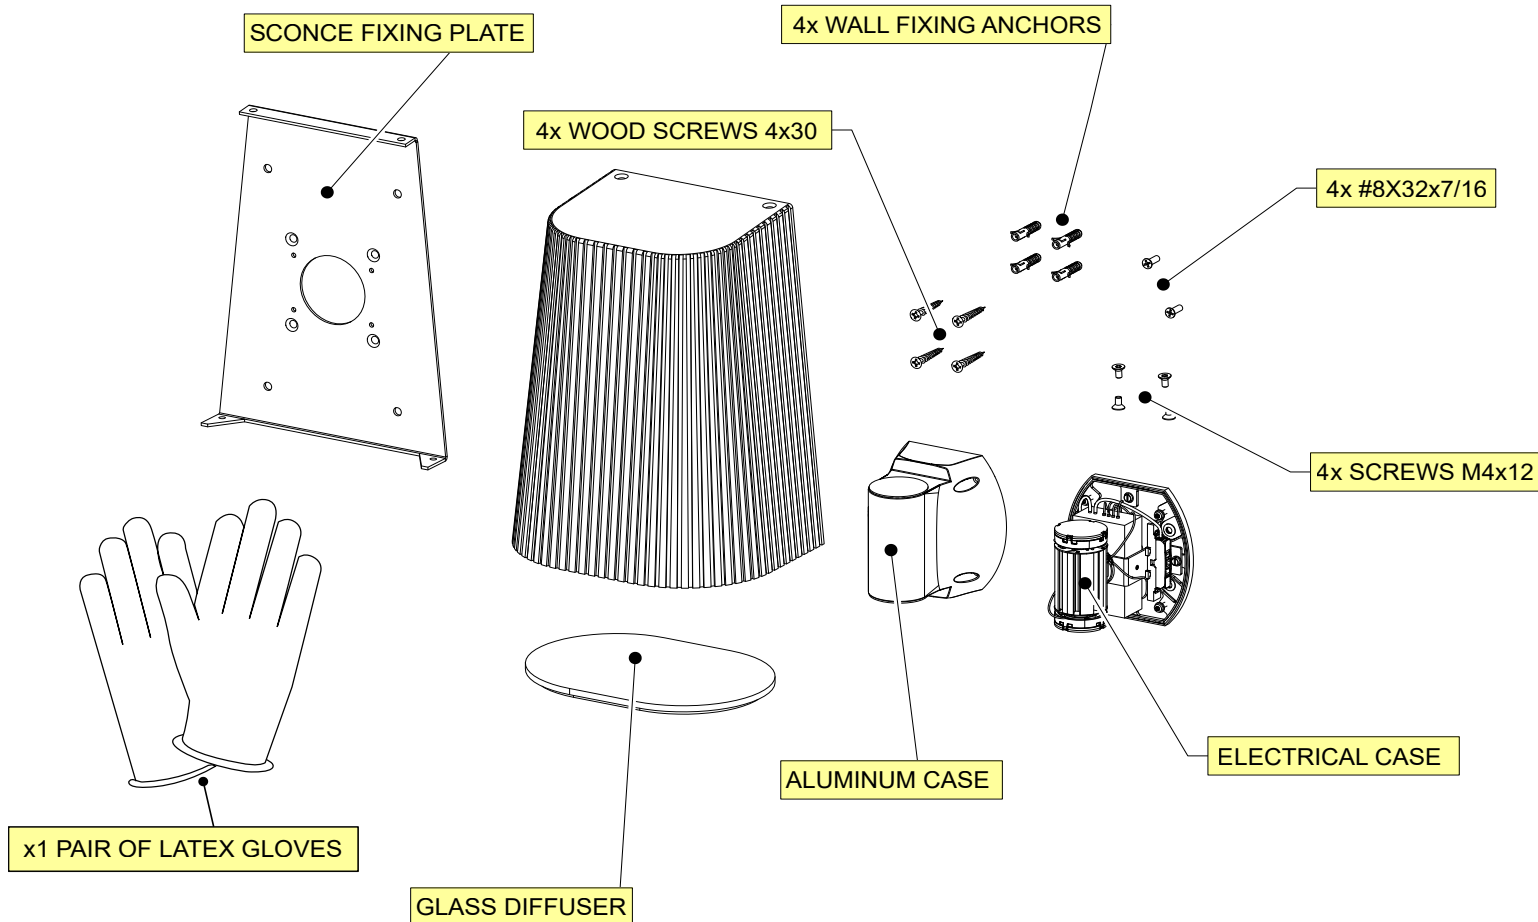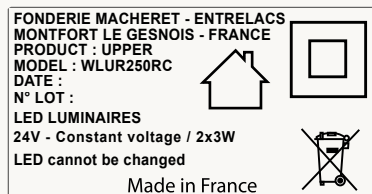

ANY HELP ?

support@entrelacs-creation.fr


WHATSAPP



UPPER 250
WLUR250RC
SCONCE




INSTALLATION INSTRUCTIONS

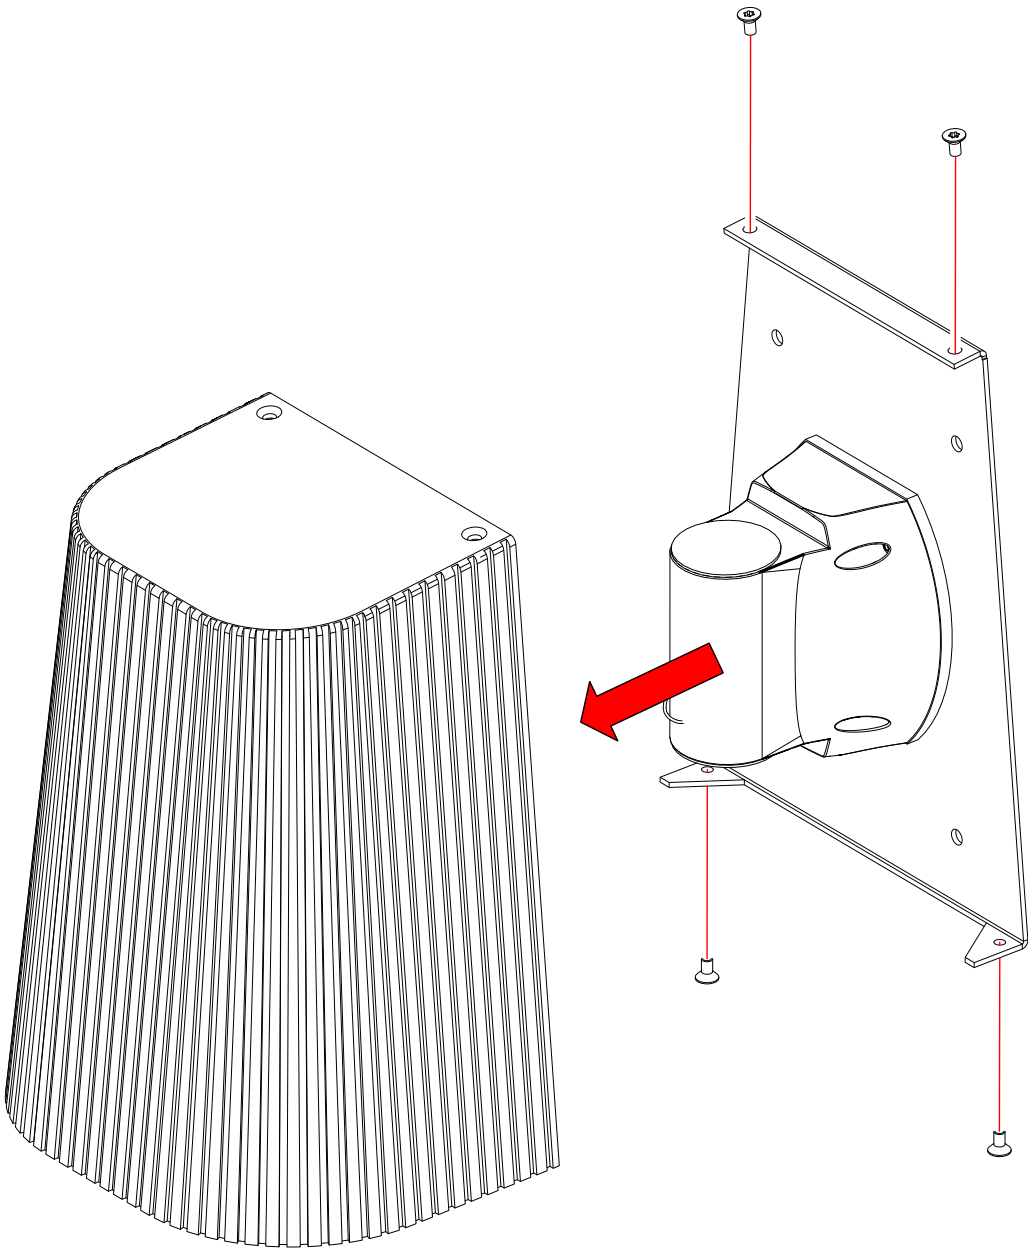

UPPER 250
WLUR250RC
SCONCE



INSTALLATION INSTRUCTIONS

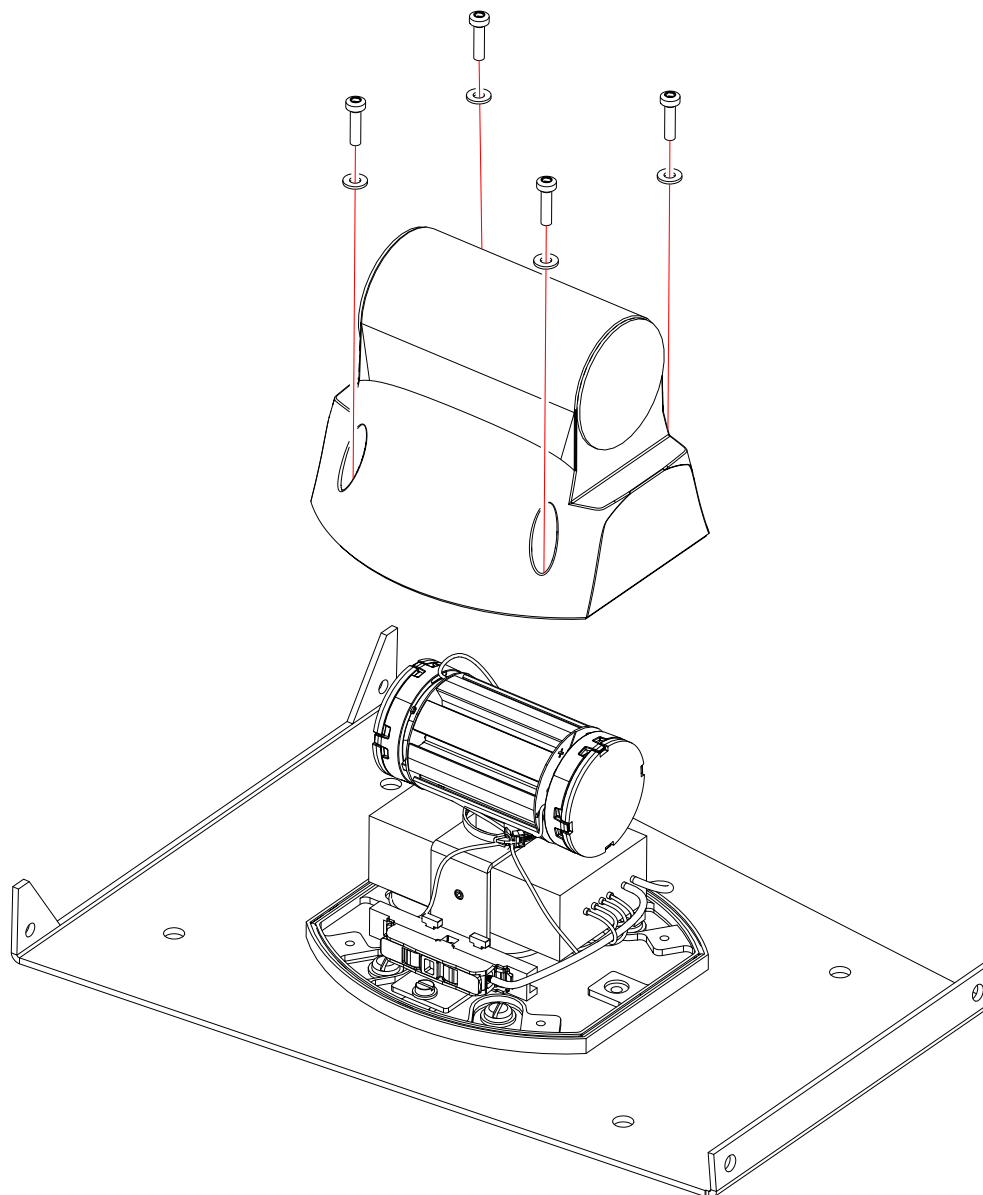


ENTRELACS

UPPER 250
WLUR250RC
SCONCE




INSTALLATION INSTRUCTIONS

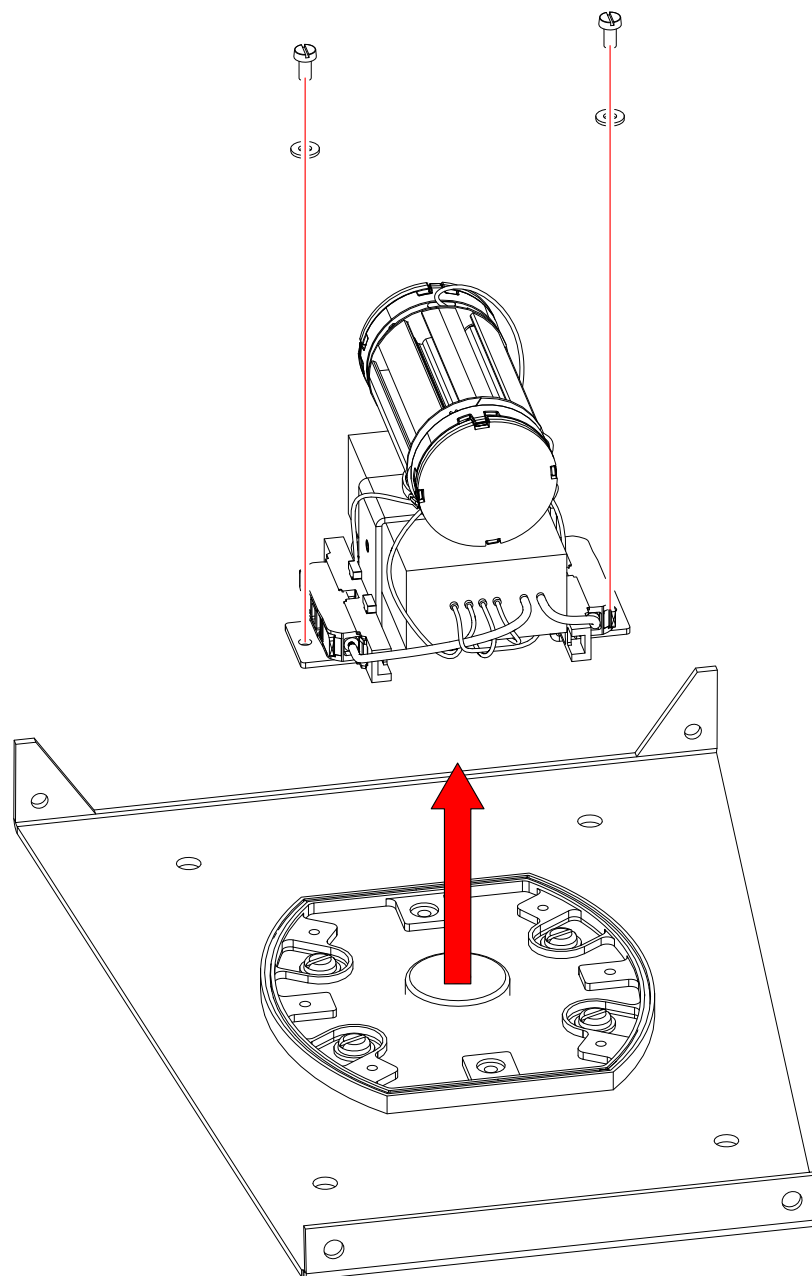

ENTRELACS

UPPER 250
WLUR250RC
SCONCE

INSTALLATION INSTRUCTIONS

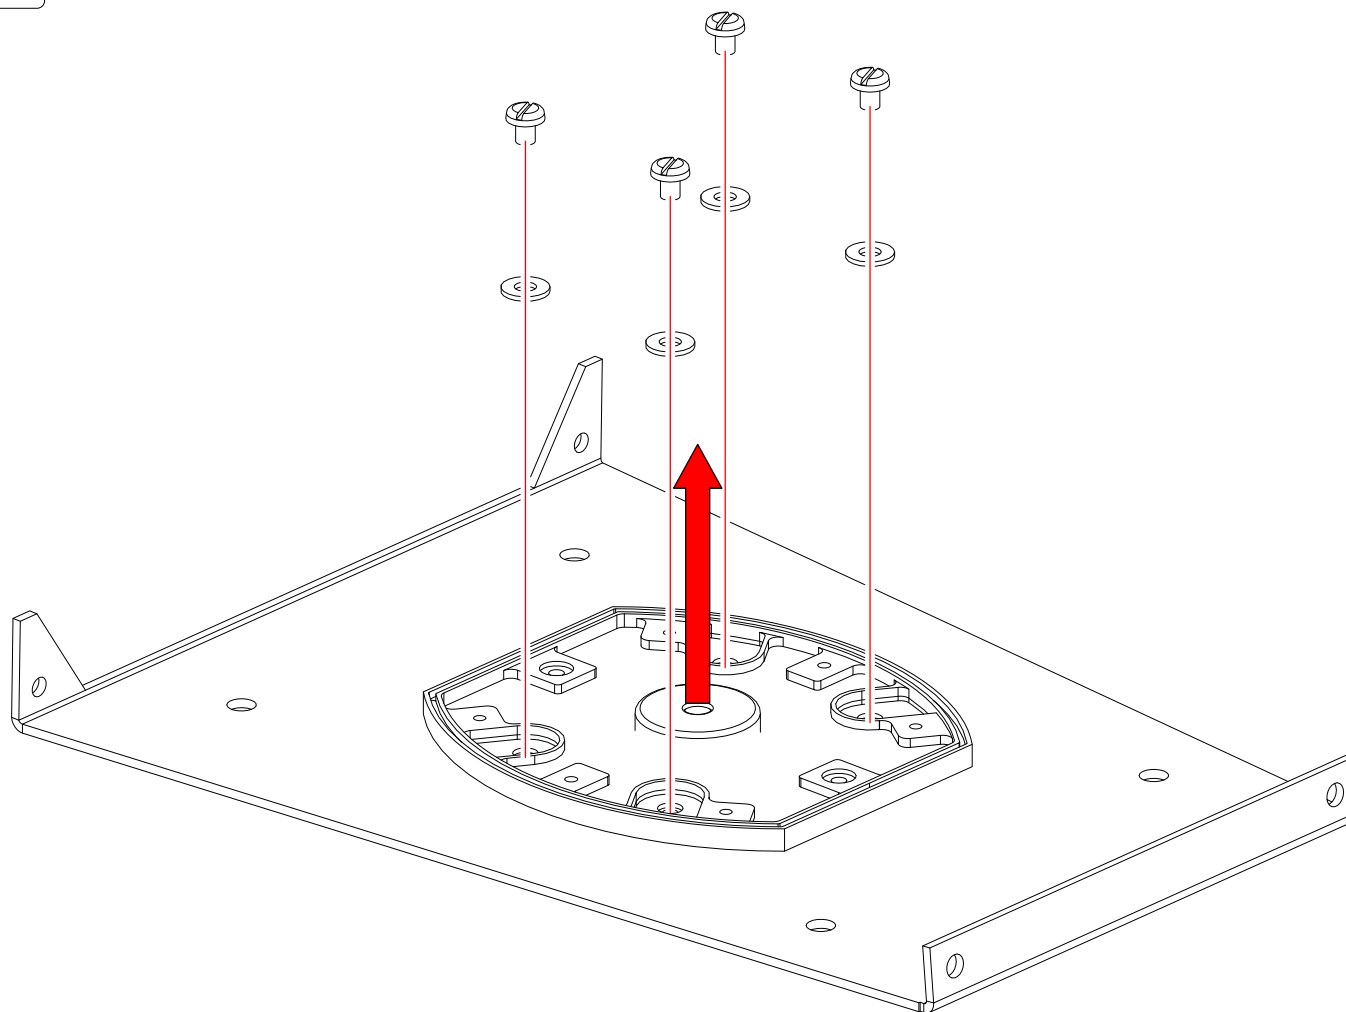


ENTRELACS

UPPER 250
WLUR250RC
SCONCE



INSTALLATION INSTRUCTIONS

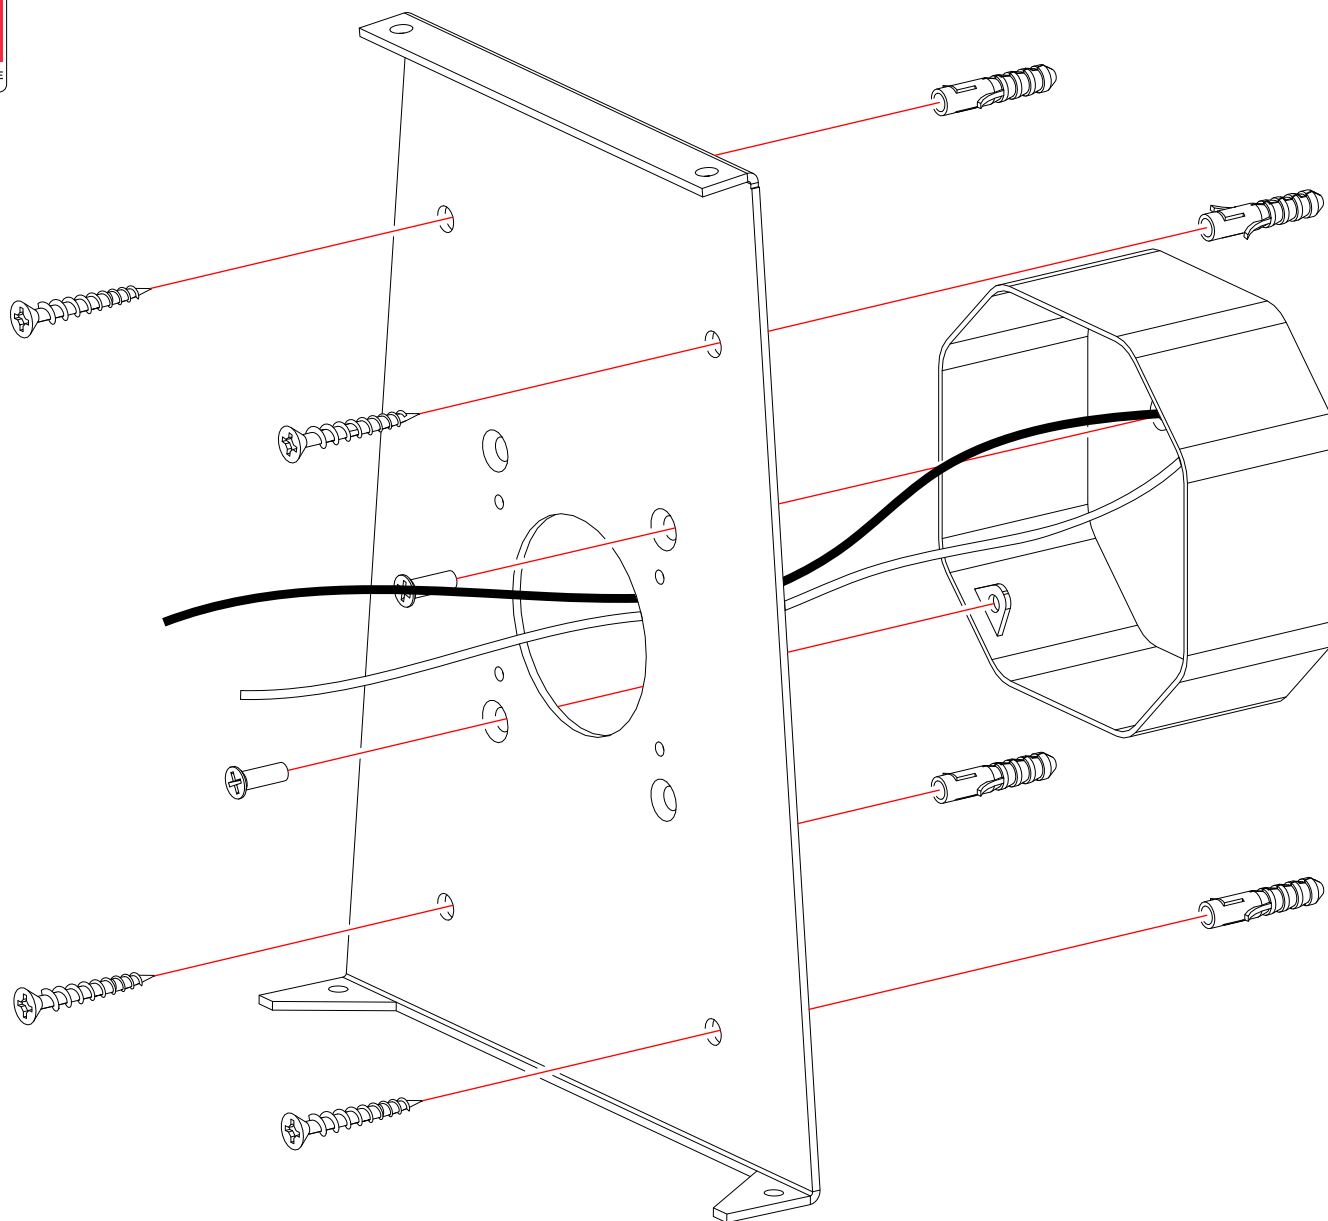


ENTRELACS

UPPER 250
WLUR250RC
SCONCE




INSTALLATION INSTRUCTIONS

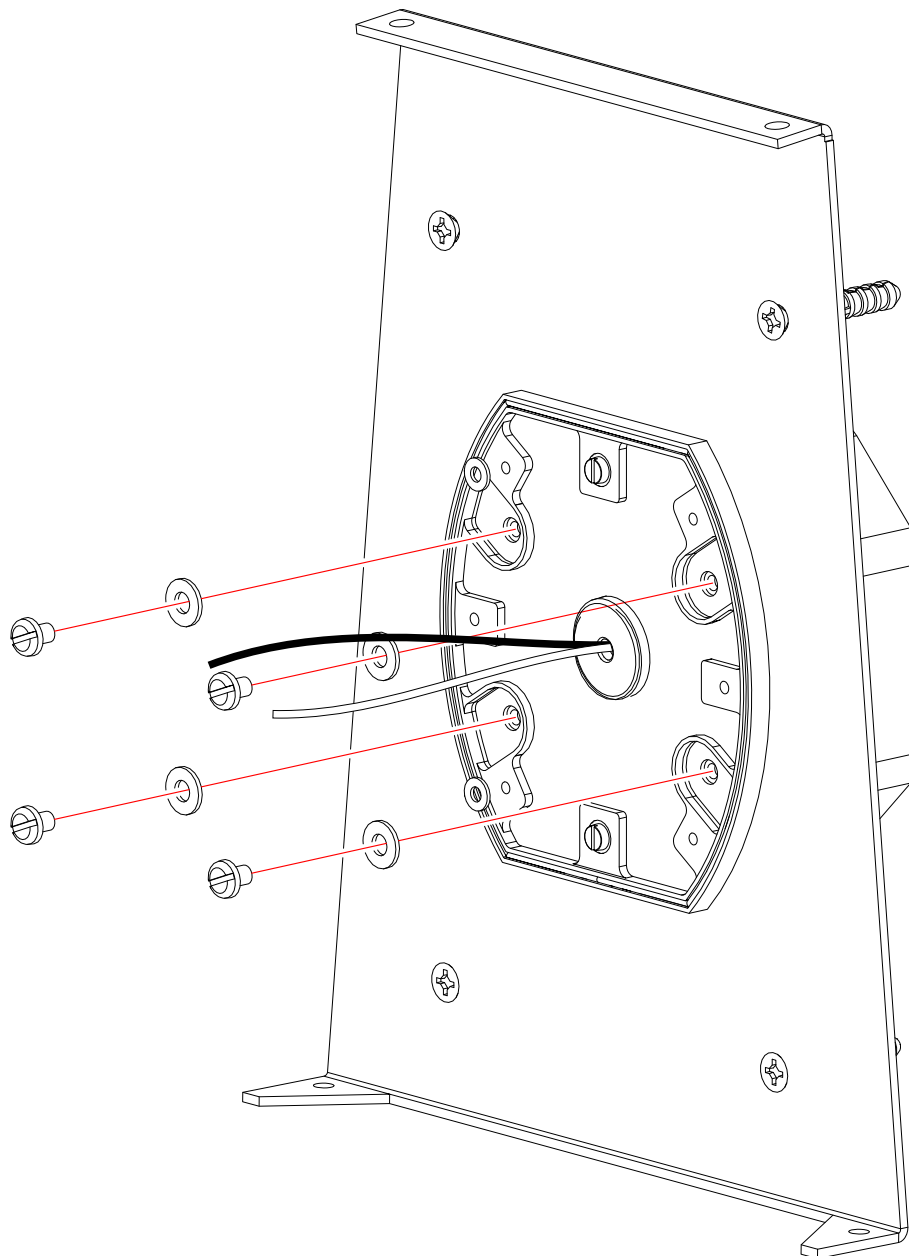

ENTRELACS

UPPER 250
WLUR250RC
SCONCE


INSTALLATION INSTRUCTIONS

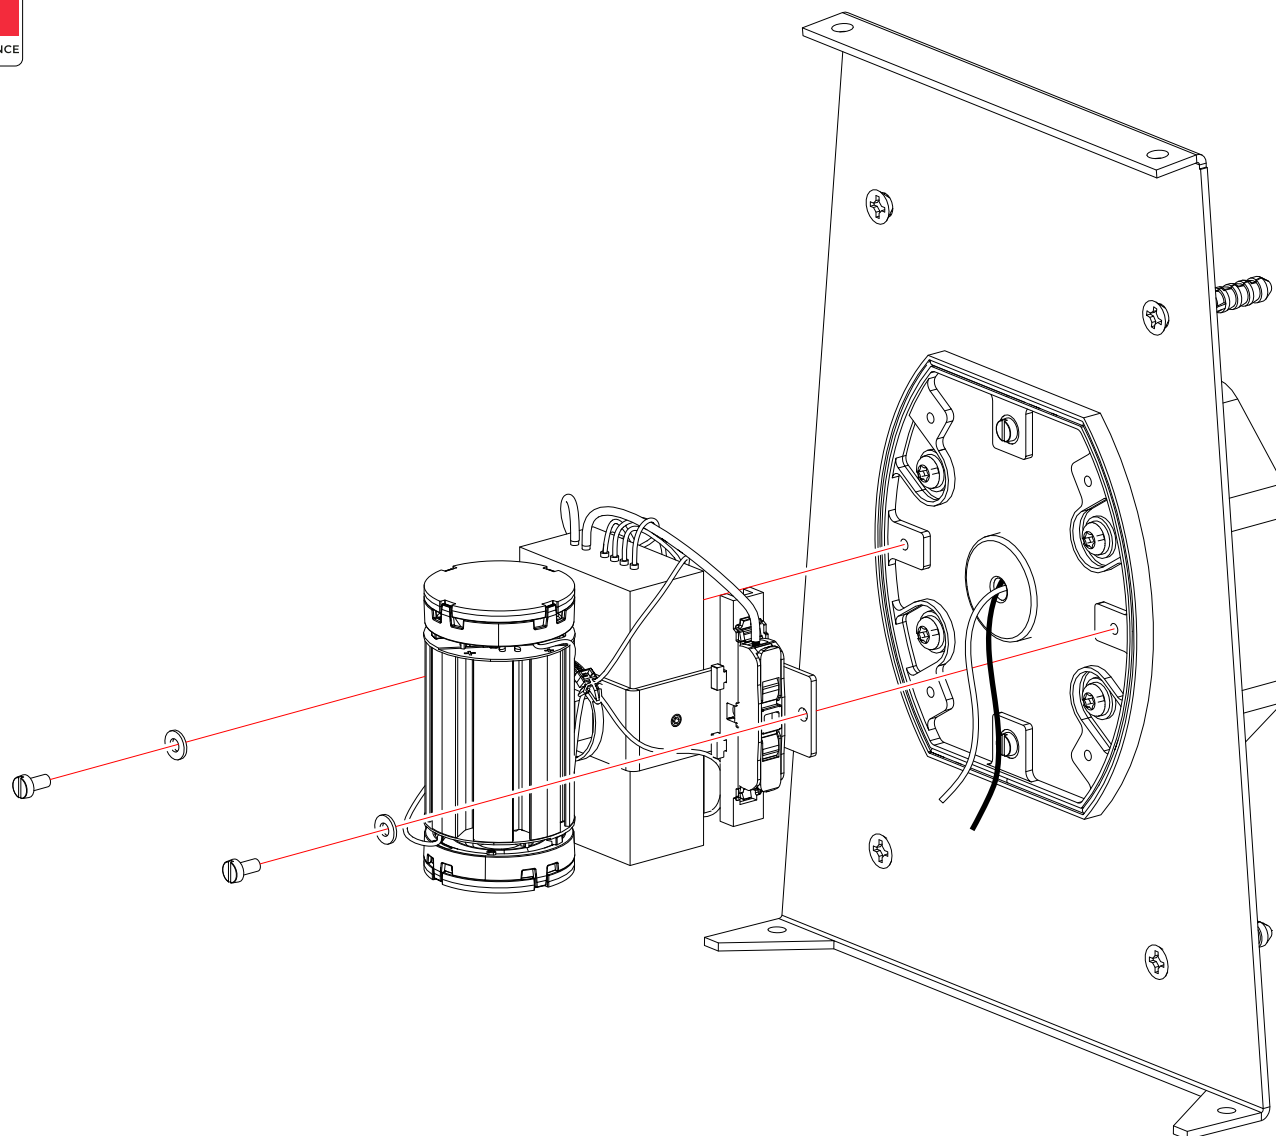

UPPER 250
WLUR250RC
SCONCE




INSTALLATION INSTRUCTIONS

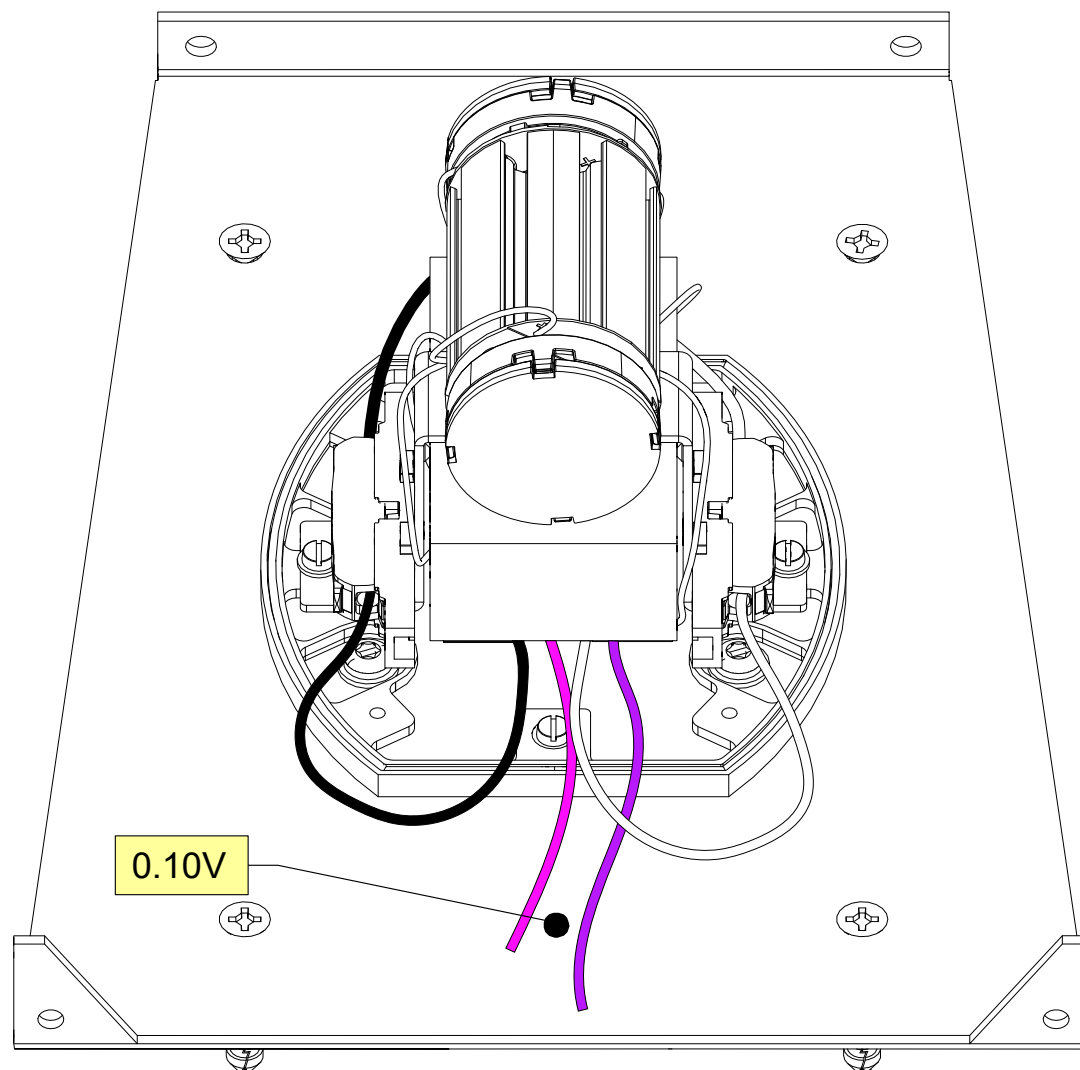

UPPER 250
WLUR250RC
SCONCE




INSTALLATION INSTRUCTIONS

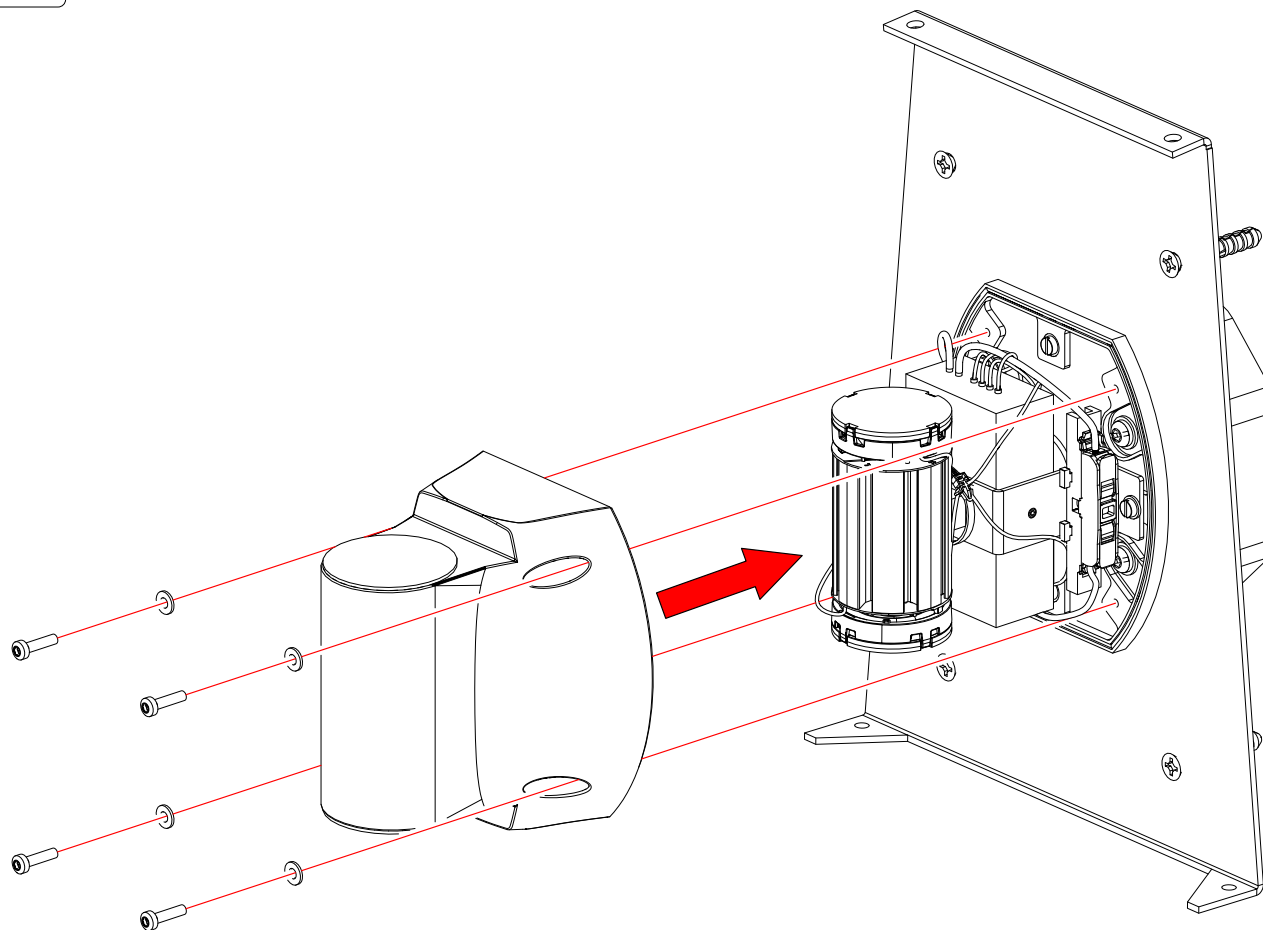

UPPER 250
WLUR250RC
SCONCE




INSTALLATION INSTRUCTIONS

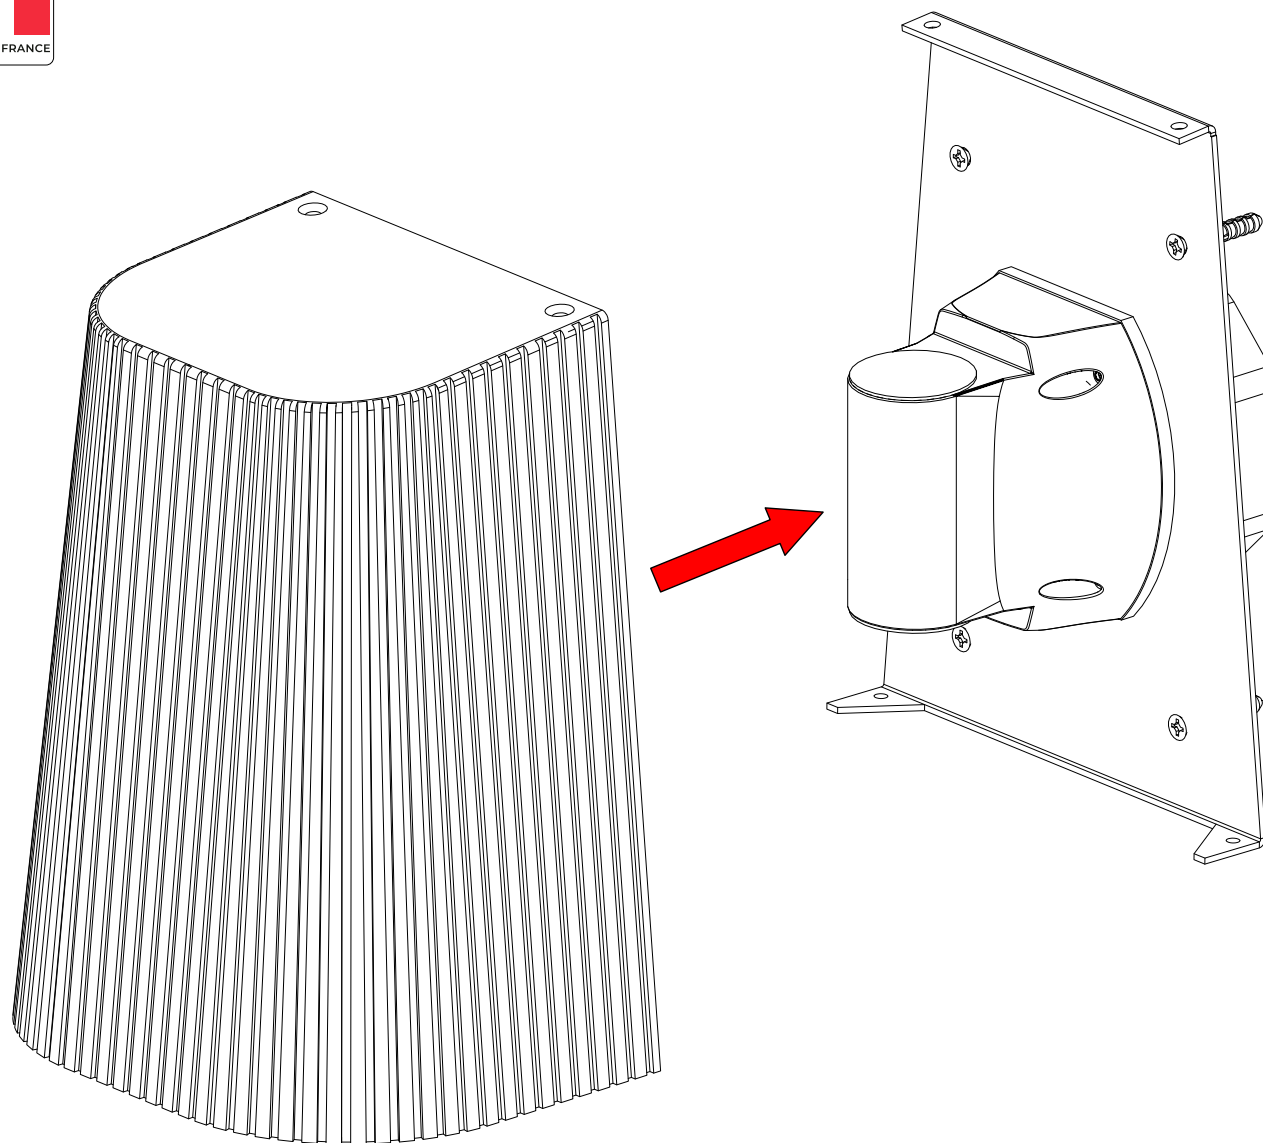

UPPER 250
WLUR250RC
SCONCE



INSTALLATION INSTRUCTIONS

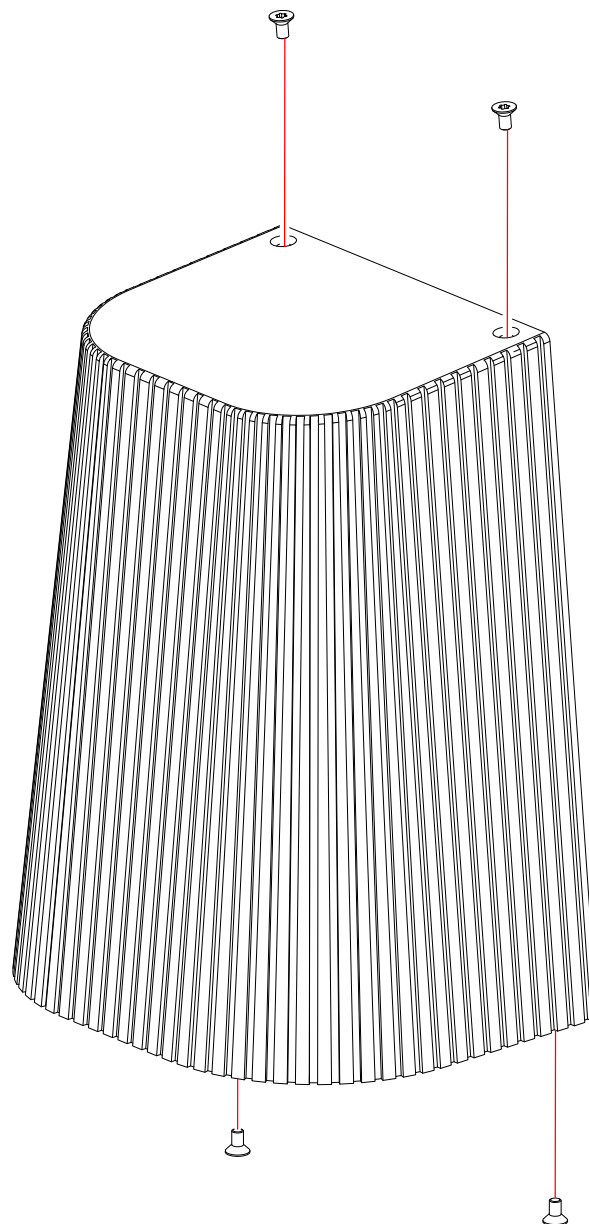


ENTRELACS

UPPER 250
WLUR250RC
SCONCE



MADE IN FRANCE

INSTALLATION INSTRUCTIONS

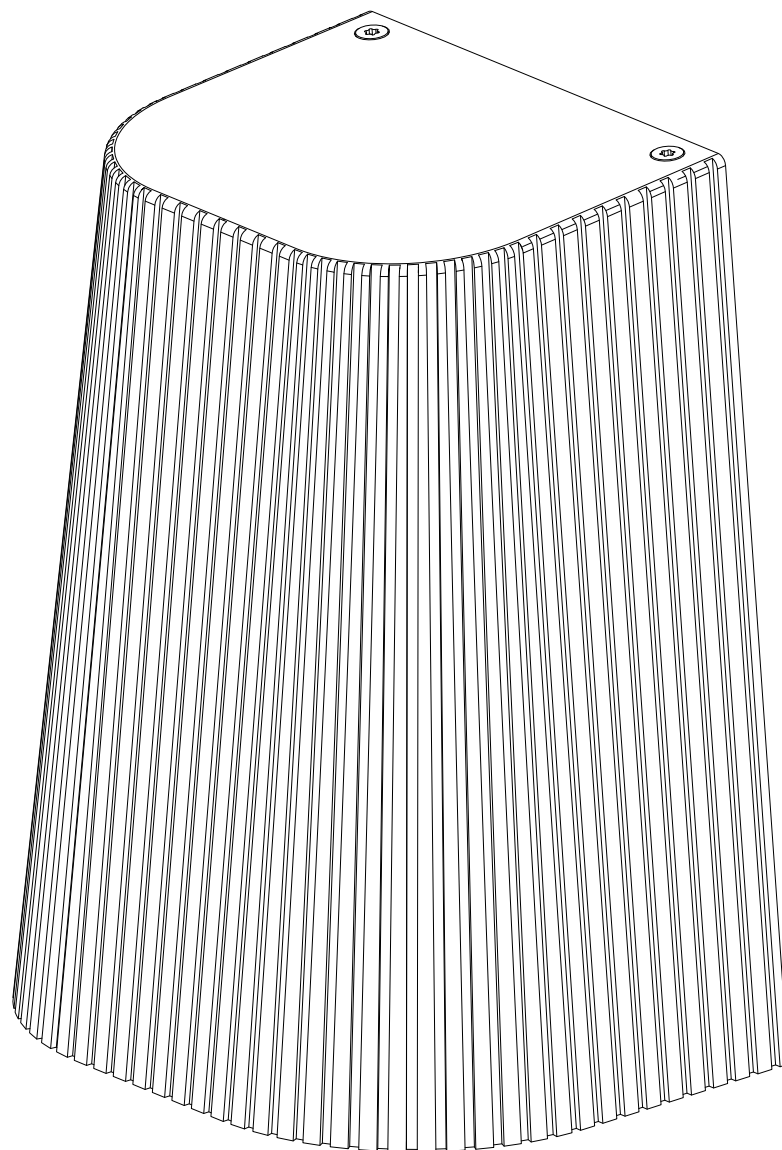

ENTRELACS



ENTRELACS

HAND-MADE IN FRANCE

ENTRELACS is a registered trademark
of FONDERIE D'ART MACHERET
31 ZA la Pécardière - 72450 Montfort le Gesnois - FRANCE
tel. +33 (0)2 43 54 84 84 - contact@entrelacs-creation.fr